

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 032 214 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
30.08.2000 Bulletin 2000/35

(51) Int. Cl.<sup>7</sup>: H04N 7/26, H04N 7/50

(21) Application number: 00103895.9

(22) Date of filing: 24.02.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 25.02.1999 JP 4761399

(71) Applicant:  
MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.  
Kadoma-shi, Osaka 571-8501 (JP)

(72) Inventors:  
• Etoh, Minoru  
Kawasaki-shi Kanagawa 213-0013 (JP)

• Uenoyama, Tsutomu  
Kawasaki-shi, Kanagawa 210-0022 (JP)  
• Iwasaki, Osamu  
Tokyo 174-0074 (JP)  
• Komiya, Daisaku  
Tokyo 166-0014 (JP)

(74) Representative:  
Grünecker, Kinkeldey,  
Stockmair & Schwanhäusser  
Anwaltssozietät  
Maximilianstrasse 58  
80538 München (DE)

(54) Method and apparatus for transcoding moving picture data

(57) The transformation method for moving picture coding system reads data of a frame from the first data sequence in the first moving picture moving coding system, prereads a coding mode of a successive frame to record, and when the preread coding mode of the successive frame is the intra-frame coding mode, performs a control not to perform coding of a present frame or

decrease a generated code amount corresponding to the generated code content of the second data sequence in the second moving picture coding system. Then, the method preferentially transforms data coded by the intra-frame coding mode existing in the first data sequence to the second data sequence.

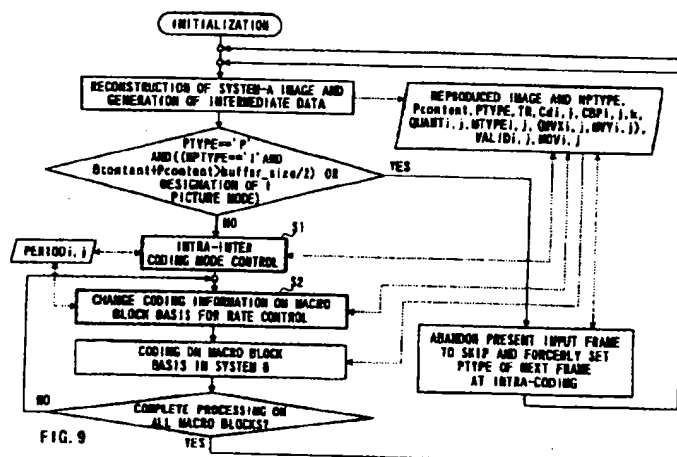


FIG. 9

BEST AVAILABLE COPY

EP 1 032 214 A2

## Description

## BACKGROUND OF THE INVENTION

## 5 Field of the Invention

[0001] The present invention relates to a method and apparatus for transforming a moving picture coded by a coding system into another moving picture coded by another coding system.

## 10 Description of the Related Art

[0002] With the progress of multimedia techniques for handling voice, image and other data collectively, conventional information media such as a newspaper, magazine, television, radio, and telephone, which are means for conveying information to people, become subjects for the multimedia.

15 [0003] Generally, the multimedia are considered to show not only characters but also other information such as figures, voices, or particularly images, associated with characters at the same time. In order to make the above-mentioned conventional information media the subjects for the multimedia, representing the conventional information in digital format is the essential condition.

[0004] However, the estimation of the code amount of each of the conventional information media in digital format results in 64 kb per second for voices (telephone quality) and equal to or more than 100 Mb per second for moving pictures (current television reception quality), while the code amount for a character is 1 to 2 bytes. Therefore, it is not realistic to handle such a massive code amount in digital format without using any transformation.

[0005] For example, a video teleconferencing system is already put to practical use with an Integrated Services Digital Networks (ISDN) with a transmission rate of 64 kbps to 1.5 Mbps, it is however impossible to transmit images for a television or camera directly without the transformation with the ISDN.

[0006] A data compression technique is consequently required. For example, the video teleconferencing system uses moving picture compression techniques of the H.261 standard and H.263 standard that are international-standardized by the ITU-T (Telecommunication Standardization Sector of International Telecommunication Union).

[0007] Further, according to the information compression technique of the MPEG standard, ordinary television broadcast moving picture is compressed to 2 to 15 Mbps.

[0008] Herein, the MPEG (Moving Picture Experts Group) means the operation group (ISO/IEC JTC1/SC29/WG11) working for the standardization of speech and moving picture coding in the ISO (International Organization for Standardization), and also means the international standardization of the data compression that this group defines, at the same time. Currently, the MPEG has standardized MPEG-4 enabling the coding and processing by an object basis to achieve the new function needed for the multimedia technique.

[0009] A plurality of moving picture coding standards are thus to be used, resulting in the problem to be solved that coded data (hereinafter referred to as bit-stream) in such standards is not compatible with each other.

[0010] For example, although a decoder based on MPEG-4 is specified to be capable of decoding H.263 bit-stream, there is generally no compatibility of bit-stream between coding systems of H.261, H.263, MPEG-2 and MPEG-4 (in other words, it is not possible to use a coder and decoder based on different coding systems as a pair).

[0011] This condition requires an apparatus that transforms bit-streams based on the different coding systems (hereinafter referred to as transcoder).

[0012] FIG.1 illustrates a conceptual diagram of the transcoder. In FIG.1, different coding systems are A and B, decoder 101 with a system A and coder 103 with a system B are connected through a frame memory and image transformer 102.

[0013] For example, it is assumed that the system A is MPEG-2 (picture size: 704 × 480 pixels), and that the system B is H.263 (picture size: 360 × 288 pixels). Although the picture sizes thereof are different from each other, it is possible to perform the transformation by once transforming the bit-stream to an image, and then coding the image again.

[0014] In addition, the H.261, H.263, MPEG-2 and MPEG-4 coding systems use Motion-Compensated Discrete Cosine Transformation coding system (hereinafter referred to as MC-DCT coding) as a common method. In the MC-DCT coding system, an image is divided into blocks each of which is called a micro block comprised of 16 × 16 pixels, a shifted amount (motion vector) that minimizes a differential between successive images (frames) is calculated, and the differential is subjected to Discrete Cosine Transform (DCT) coding.

[0015] The processing to obtain the motion vector that minimizes the differential between the frames to obtain a differential image from which the redundancy is removed is called motion compensation.

[0016] DCT is used to remove spatial redundancy left in the motion-compensated image (differential image).

[0017] In addition, a first frame is coded using only DCT because the differential coding with another frame is not performed. Such a frame is called I picture, and other general picture to be subjected to MC-DCT coding is called P

picture.

[0018] If the MC-DCT coding system as described above is used in the coding systems A and B, it is possible in decoding in FIG.1 to obtain secondary information (hereinafter referred to as side information) generated in the MC-DCT coding such as moved information and DCT coefficient quantization, and it is expected that the use of the side information improves the computation efficiency and coding efficiency (image quality and coded content) in recoding.

[0019] A conventional example of the transcoder using the side information is a moving picture coding transformation apparatus disclosed in Japan Unexamined Patent Publication HEI10-271494.

[0020] FIG.2 illustrates the concept of the apparatus.

[0021] When it is assumed that the systems A and B in the transcoder illustrated in FIG.1 are respectively MPEG-2 and H.263, a configuration of 101 to 103 in FIG.1 corresponds to that of 202 to 204 in FIG.2.

[0022] In the conventional example, since the two coding systems have the MC-DCT coding system as the common method, it is possible to omit motion vector searching in H.263 coding by executing scaling (transforming an absolute value by multiplying a ratio of picture sizes) on the motion vector obtained in MPEG-2 decoding.

[0023] In the conventional example illustrated in FIG.2, with the motion vector adopted as the side information, the computation efficiency in recoding is improved using the side information obtained in MPEG-2 decoding.

[0024] In composing a practical transcoder, however, there are many subjects to be examined other than the reuse of motion vector.

[0025] In the practical coder, a process called rate control is inevitable to adjust the code amount of bit-streams output therefrom.

[0026] Generally, an output buffer is installed at an output side to absorb a variation of generated code amount, and corresponding to the buffering data in the output buffer (hereinafter referred to as buffer loaded code amount), the coded content is adjusted.

[0027] In the MC-DCT coding system, the coded content adjustment is executed by setting the quantization accuracy for the DCT coefficient to variable (fine accuracy improves the image quality and increases the generated code amount, while rough accuracy results in the opposite effects).

[0028] FIG.3 illustrates a conceptual diagram showing subjects for the transcoder.

[0029] An output terminal of output buffer 304 is connected to a communication path or storage medium. When it is assumed that the communication path has a fixed data rate, the bit-stream is output from the output buffer with the constant rate. Coder 303 with the system B adjusts the generated code amount so that data in buffer 304 is not consumed (underflow) or not excessive (overflow). Meanwhile, in order to improve the recoded image quality, it is necessary to use the side information concerning coding procedure such as quantization and coding mode. Generally speaking, when a coder with the system B is operated independently of the coding procedure of the system A, an image quality loss generated by the system B is added to the image quality loss generated by the system A.

[0030] For example, it is assumed that the bit-stream of the system A is coded at a rate of 10 frames/sec. When the reproduced result is recoded by the system B independently at a rate of 15 frames/sec, a frame with the system B of which the coding time accords that with the system A is one frame in three frames. In other words, the decoding intervals of other two frames do not accord with the original moving picture. Therefore, despite the frame rate being increased, the decoding result by the system B may not maintain, or even decrease the image quality of the system A.

[0031] The same phenomenon occurs in the quantization of DCT coefficient. It is assumed that the quantization in the system A is executed by rounding with 1/2. In order to prevent the generation of accumulated errors due to requantization, it is the most preferable that the quantization in the system B is also set to 1/2, to obtain a symmetry coded content. The frame rate conversion, requantization of DCT coefficient and picture size conversion are processing all to execute "requantization", in the broad sense, of moving pictures. For the requantization, it is preferable to operate coder 303 with the system B depending on decoder 301 with the system A in FIG.3.

[0032] As described above, in order to execute the rate control, it is preferable to operate coder 303 with the system B independently of decoder 301 to enable the control of requantization, while observing the loaded content in output buffer 304. On the other hand, in order to reduce image quality deterioration by the broad-sense requantization, it is preferable to operate coder 303 with the system B depending on decoder 301 with the system A. However, the conventional techniques concerning the transcoder is developed from a point of view to improve the computation efficiency by using the side information, for example, recoding by motion vector scaling, and a technique is not disclosed that achieves both rate control and suppression of image quality deterioration due to requantization.

#### SUMMARY OF THE INVENTION

[0033] In view of the forgoing, an object of the present invention is to provide a method and apparatus for performing a rate control while suppressing image quality deterioration in transforming a moving picture coding system.

[0034] A first aspect of the present invention is a method and apparatus for transforming, sequentially from a head of data, a first data sequence generated by a first moving picture coding system comprised of an intra-frame coding

mode and inter-frame coding mode to a second data sequence generated by a second moving picture coding system comprised of the intra-frame coding mode and inter-frame coding mode, and the method and apparatus

1. read data of a frame from the first data sequence, and further preread a coding mode of a successive frame; and
2. decides whether the present frame should be coding or not for decrease a generated code amount, corresponding to a generated code amount of the second data sequence transformed to the second moving picture coding system in the case where the preread coding mode of the successive frame is the intra-frame coding mode. Then the data coded by the intra-frame coding mode existing in the first data sequence is preferentially transformed to the second data sequence.

[0035] According to such method and apparatus, it is possible to perform stable coding which does not cause the overflow in coding an 'I' frame, by prereading the coding mode of the successive frame, and controlling the coded content of the present frame corresponding the coding mode of the successive frame and the coded content generated in the system transformation.

[0036] A second aspect of the present invention is a method and apparatus for transforming a first data sequence generated by a first moving picture coding system to a second data sequence generated by a second moving picture coding system, while transforming a frame or a picture portion obtained by dividing a frame on a coding-unit basis sequentially from a head of data, and the apparatus and method

1. record a code amount of the coding-unit in reading data of the coding-unit from the first data sequence, and
2. set a target value of the generated code amount of the second data sequence at a value obtained by multiplying the recorded code amount by a predetermined factor in transforming the data of the coding-unit to that of the second moving picture coding system, and then control a rate so that a ratio of code amounts, on a coding-unit basis, of data composing said first data sequence comes close to a ratio of code amounts, on the coding-unit basis, of data composing said second data sequence.

[0037] According such method and apparatus, it is possible to perform the recoding faithful to original rate control, and to suppress image quality deterioration due to errors accumulated by requantization, by recording the code amount of a frame of original image data, and setting the target value of the generated code amount of the second data sequence at the value obtained by multiplying the recorded code amount by the predetermined factor in transforming the data in the second moving picture coding system.

[0038] A third aspect of the present invention is a method and apparatus for transforming, sequentially from a head of data, a first data sequence generated by a first moving picture coding system that switches an intra-frame coding mode and inter-frame coding mode on a block-by-block basis to a second data sequence generated by a second moving picture coding system that switches the intra-frame coding mode and inter-frame coding mode on the block-by-block basis, and the method and apparatus select the intra-frame coding mode more in the second moving picture coding system than in the first moving picture coding system in the case where a generated code amount of the second data sequence does not reach a target value.

[0039] According to such method and apparatus, the capacity of an output buffer is adjusted by inserting the intra-frame coding mode when the capacity left in the output buffer is relatively large. It is thus possible to perform rate control without changing quantization characteristics, and to suppress image quality deterioration caused by requantization.

[0040] A fourth aspect of the present invention is a method and apparatus for transforming, sequentially from a head of data, a first data sequence generated by a first moving picture coding system that switches an intra-frame coding mode and inter-frame coding mode on a block-by-block basis to a second data sequence generated by a second moving picture coding system that switches the intra-frame coding mode and the inter-frame coding mode on the block-by-block basis, and the method and apparatus select the inter-frame coding mode more in the second moving picture coding system than in the first moving picture coding system in the case where a generated code amount of the second data sequence exceeds a target value.

[0041] According to such method and apparatus, the capacity of an output buffer is adjusted by inserting the inter-frame coding mode when the capacity left in the output buffer is relatively small. It is thus possible to perform rate control without changing quantization characteristics, and to suppress image quality deterioration caused by requantization.

[0042] A fifth aspect of the present invention is a method and apparatus for sequentially transforming a first data sequence generated by a first unlossless moving picture coding system with an information loss caused by quantization to a second data sequence caused by a second unlossless moving picture coding system with an data loss generated by quantization, and the method and apparatus:

1. record a quantization scale in reading data from the first data sequence; and
2. change a quantization scale to integral times the acquired quantization scale in adjusting the generated code

amount of the second data sequence.

[0043] According to such method and apparatus, it is possible to suppress image quality deterioration caused by requantization, by changing the quantization scale by integral times when the rate control is performed by changing the quantization scale.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0044] The above and other objects and features of the invention will appear more fully hereinafter from a consideration of the following description taken in connection with the accompanying drawing wherein one example is illustrated by way of example, in which;

FIG. 1 illustrates a conceptual diagram of a transcoder;

FIG. 2 is a diagram illustrating an exemplary conventional transcoder;

FIG. 3 illustrates a conceptual diagram showing subjects for the transcoder;

FIG. 4 is a diagram illustrating an image data structure in the H.261 standard;

FIG. 5 is a diagram illustrating a data structure in the H.261 standard;

FIG. 6 is a diagram illustrating an image data structure in the MPEG-4 visual simple profile;

FIG. 7 is a diagram illustrating a data structure in the MPEG-4 visual simple profile;

FIG. 8 is a diagram illustrating intermediate data in a transcoder;

FIG. 9 is a flowchart for the entire process of the transcoder;

FIG. 10 is a flowchart to control intra-inter coding mode in a transformation of H.261 to MPEG-4;

FIG. 11 is a flowchart to change coding data on a macroblock-by-macroblock basis for rate control in the transformation of H.261 to MPEG-4;

FIG. 12 is a flowchart to control intra-inter coding mode in a transformation of MPEG-4 to H.261;

FIG. 13 is a flowchart to change coding data on a macroblock-by-macroblock basis for rate control in the transformation of MPEG-4 to H.261;

FIG. 14 is a conceptual diagram of a transcoder of the present invention;

FIG. 15 is a diagram illustrating the transcoder from H.261 to MPEG-4; and

FIG. 16 is a diagram illustrating the transcoder from MPEG-4 to H.261.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0045] The embodiments describe the case that a bit-stream coded in the moving picture coding system based on ITU-T Recommendation H.261 is transformed to the bit-stream in the moving picture coding system based on the MPEG-4 standard, and another case that the opposite transformation is performed. Both systems are representative coding systems performed based on the MC-DCT system, and the details thereof are respectively described in an ITU-T Recommendation H.261 document (H.261 Recommendation, LINE TRANSMISSION OF NON-TELEPHONE SIGNALS 03/1993) and in an ISO standardization document (Document Number ISO/IEC JTC1/SC29/WG11 N2502 Document Name INFORMATION TECHNOLOGY-GENERIC CODING OF AUDIO-VISUAL OBJECTS Part 2: Visual ISO/IEC 14496-2, published 10/1998. Further, used as a reference of operations of H.261 coder that is not specified in the standardization is CCITT (currently ITU-T) SG15 Working Party 15/4, Specialists Group on Coding for Visual Telephony Document 525, Description of Ref. Mode18 (RM8), June, 1989.

[0046] The data structure in the H.261 standard is first explained.

[0047] FIG. 4 illustrates an image data structure in the H.261 standard. An image to be coded is called QCIF (Quarter Common Interface Format), and is assumed to have 176 pixels in the horizontal direction and 144 pixels in the vertical direction. Also in the H.261 standard, the image is divided to macro blocks each comprised of 16×16 pixels. The motion compensation is performed on a macroblock-by-macroblock basis, while the DCT coding is performed on a DCTblock-by-DCTblock basis. The DCT block is comprised of 8×8 pixels. Since 4 DCT blocks are necessary for luminance, and 2 DCT blocks are necessary for chrominance (1 for Cb or Cr) because the resolution therefor is half that for luminance in the horizontal and vertical directions, the macro block is composed of 6 DCT blocks. A block comprised of three lines of macro blocks is called GOB (Group of Block).

[0048] FIG. 5 illustrates the data structure coded based on the H.261 standard. The explanation is performed while separating the bit-stream to four layers. The bit-stream is composed of repeated pictures (frames), and has PSC (Picture Start Code) at a first portion followed by TR (Temporal Reference), and then PTYPE (Picture Type; Type data). In H.261, PTYPE is indicative of a picture size and reproduction mode, and not indicative of information on whether the frame is subjected to intra-frame coding (intra-coding) or inter-frame coding (inter-coding). Thereafter, GOB layers are repeated (three times in the case of QCIF).

[0049] The head of GOB layer is started by GBSC (GOB Start Code). GN (GOB Number) succeeds GBSC, and then GQUANT (Quantization Characteristic Data) is transmitted. In H.261, the quantization of DCT coefficients is performed with a quantization scale represented by one of indices of 1 to 31 in the inter-coding, while a single type of such quantization corresponding to index 8 is performed in the intra-coding.

[0050] The quantization scale of DCT coefficient for the GOB is instructed with GQUANT. Macro block data is repeated at an end portion of the GOB layer. The macro block data is started with MBA (Macro Block Address), which indicates a relative position of macro block containing valid code. In the MC-DCT coding, an image is reproduced in a still region without transmitting a motion vector and also DCT coefficient.

[0051] In such a region, it is not necessary to transmit data of macro blocks, which is called macro block skip, and therefore MBA is needed. MTYPE (Type data) is used to instruct whether the macro block is inter-frame coded or intra-frame coded. In the MC-DCT coding except H.261, it is general that the switching between intra-coding and inter-coding is performed on a macroblock-by-macroblock basis in addition to the switching between intra-coding and inter-coding on a frame-by-frame basis.

[0052] Further, MTYPE includes information on whether the macro block is subjected to loop filter. The loop filter is specific processing in H.261 (not included in other standards) to subject a motion-compensated predicted image to filtering by local-averaging. Since the predictive efficiency is improved in some cases, the loop filtering is adaptively used. MQANT (Quantization Characteristics) is indicative of the quantization scale of DCT coefficient for the GOB determined with GQUANT, and is transmitted in the case where the quantization scale is needed to be changed on a macroblock-by-macroblock basis. MVD (Motion Vector Data) is indicative of a motion vector used for motion compensation. CBP (Coded Block Pattern) is indicative of a significant block pattern.

[0053] Among total 6 DCT blocks, it is not necessary to transmit a block of which the quantized DCT coefficients show all zero. Therefore, the DCT coefficients are transmitted while designating only a block with non-zero coefficients with CBP.

[0054] The MPEG-4 standard is next explained.

[0055] MPEG-4 has a variety of functions called profiles used depending on applications. The embodiments use a simple profile that is the simplest one as a subject of the transformation.

[0056] FIG.6 illustrates an image data structure in MPEG-4. In H.261, the picture size is defined as a QCIF picture and CIF picture with horizontal and vertical sizes respectively twice those of CIF (Common Interface Format) picture. In MPEG4, however, the picture size is arbitrary, and not limited to even a number multiplied by 16. Further, in MPEG-4, the aspect ratio of a pixel (ratio of a vertical line to a horizontal line when the pixel is considered to be a rectangle) is also arbitrary. Such a ratio is 4:3 in H.261.

[0057] Therefore, picture sizes to be handled hereinafter are all matched with those specified in H.261 to simplify the explanation.

[0058] A structure called Video Packet is defined in MPEG4 instead of GOB in H.261. On the contrary to that GOB is obtained by dividing an image to fixed rectangles, a starting point of the Video Packet is arbitrary on a macroblock-by-macroblock basis. The other structures of DCT block are almost the same as in H.261, and omitted in FIG.6.

[0059] In MPEG-4, an image corresponding to a frame or picture is called Video Object Plane (hereinafter referred to as VOP).

[0060] A bit-stream in MPEG4 starts with VSC (VOP start code) followed by VTYPE (vop coding type) indicative of information on whether the frame is intra-frame coding (intra-coding) or inter-frame coding (inter-coded). In H.261, TR (Temporal Reference) is indicative of a frame number as a time indication, however, in MPEG4, a passing time from a reference frame is directly instructed with MTB (module time base) with the order of a second, and with VTI (vop time increment) with the order of less-than-second, of which the detailed explanation is described in the above reference and omitted herein. VQAUNT is indicative of quantization characteristic data, corresponding to GQUANT in H.261, to designate a quantization scale in the entire image. RSM (Resync Marke) is inserted before a Video Packet header to perform resynchronization promptly for transmission error. The Video Packet header contains data concerning VOP needed after the resynchronization.

[0061] The macro block data starts from NCD (Not Coded, invalid flag). In H.261, an invalid macro block is skipped by using a relative address to next valid macro block with MBA, however, in MPEG4, the invalid macro block is represented by a flag of 1 bit. MCBPC (macroblock type and the coded block pattern for chrominance) is used to perform the switching between intra-coding and inter-coding in the same way as MTYPE.

[0062] In addition, since MPEG-4 does not include the loop filter, MCBPC does not include an indication for the loop filter. Meanwhile, MCBPC is indicative of valid/invalid pattern of DCT block of a signal. In other words, MCBPC includes data concerning chrominance signal among data of CBP in H.261. With respect to the valid/invalid pattern of luminance DCT blocks, a pattern of luminance four blocks composing macro blocks is represented with CBPY (luminance significant block pattern).

[0063] DQUANT is for use in changing the quantization scale of DCT coefficients on a macroblock-by-macroblock basis. An increment or decrement value is designated in the range of -2 to +2, which is different from MQANT. MVD

(Motion Vector Data) is indicative of a motion vector used in motion compensation. The accuracy in H.261 is of an integer-number-of-pixel basis, however the accuracy in MPEG-4 is of a half-pixel (0.5 pixel) basis. The structure of DCT coefficient block is almost the same as in H.261.

[0064] As described above, MPEG-4 with the simplest structure shares the basic structure of the MC-DCT with H.261, and although the data structure of MPEG-4 is different in representation way (coding description) from that of H.261, there is a lot of compatibility in both data. The considerable differences between H.261 and MPEG4 in transforming the coding system are as follows:

#### Motion compensation

[0065]

H.261: Integer-accuracy  
and loop filter

MPEG4: half-pixel accuracy

A search range can be changed by scaling called F value; and there is a mode in which four motion vectors are present per a macro block.

#### DCT coefficient quantization

[0066]

Linear quantization with the same quantization scale in H.261 and MPEG4

in addition, with respect to a direct current component in an intra-coding mode, MPEG4 has a non-linear quantization mode, while the intra-coding in H.261 fixes a quantization index to 8.

[0067] From the differences as described above, a transcoder cannot have a configuration to transfer DCT coefficient directly, and therefore has a configuration, as illustrated in FIG. 3, where in transforming data based on the system A (H.261 or MPEG4) to data based on the system B (MPEG4 or H.261), the system-A-coded data is once decoded and the decoded image is recoded through frame memory 302.

[0068] In this case, as the side information, intermediate data for the transcoder illustrated in FIG.8 is considered.

[0069] FIG.8 also illustrates storage sections in the memory in which respective data is stored, corresponding to an embodiment described later.

[0070] The meaning of each data is explained below. As can be seen from the data structure as described above, the data can be used as the intermediate data.

- Next Frame Coding Mode NPTYPE=['I', 'P', 'U']  
Obtain by prereading during decoding in the system A. VTYPE in MPEG-4, and 'U': unfixed in H.261.
- Present Frame Coded Content Pcontent (unit:kbits) Obtain by decoding one frame in the system A  
When recoding is performed after one frame is completely decoded, the content is equivalent to a code amount for one frame. When recoding starts in the middle of decoding of an original image, the content is equivalent to a code amount obtained by the time the decoding is suspended after starting on the frame.
- Present Frame Coding Mode PTYPE=['I', 'P']  
'I' represents intra-coding, and 'P' represents inter-coding. In H.261, 'I' means all macro blocks are intra-coded, and 'P' means the other cases except the above. This is determined from PRED<sub>i,j</sub> described later.
- Present Frame Number TR (Integer number)  
In MPEG-4, obtained from MTB and VTI.
- Valid/Invalid flag CD<sub>i,j</sub>= [0, 1, 'U']  
This flag indicates valid: 0 or invalid: 1 of a macro block. i and j respectively represent horizontal and vertical positions of the macro block. 'U' represents 'unfixed'. For example, the case where a P picture in the system A is recoded to obtain an I picture in the system B is represented with 'unfixed'.
- Block Valid/Invalid flag CBP<sub>i,j,k</sub>= [0, 1, 'U']  
This flag indicates valid or invalid of a DCT block. In MPEG-4, determined by MCBPC and CBPY. Since Y×4, Cr×1 and Cb×1, k adopts values of 0 to 5.
- Quantization Scale QUANT<sub>i,j</sub> = [1, ~, 31, 'U']  
This is an index indicative of a quantization scale on a macroblock-by-macroblock basis.
- Coding mode MTYPE<sub>i,j</sub> = ['I', 'P', 'U']  
This represents a coding mode of intra or inter on a macroblock-by-macroblock basis. 'U' represents 'unfixed'.

- Motion Vector (MVX<sub>i,j</sub>, MVY<sub>i,j</sub>)  
Value is [-15, ..., 15, 'U'] Horizontal and vertical absolute values of a motion vector are represented with integer-accuracy to match with H.261 that employs the integer-accuracy.
- Intra Period PERIOD<sub>i,j</sub> = integer number of [0,99]  
In the MC-DCT system, accuracy in inter-frame DCT computation is accumulated, causing a mismatch of the computation between coding and decoding.  
To cope with it, intra-coding on a macro block should be performed within a 132-coded-frame period.  
This operation is called intra-refreshing. PERIOD is a counter to perform the intra-refreshing periodically. Default is 0.
- Moving Region flag MOV<sub>i,j</sub>, j = [0, 1, 'U']  
This flag indicates whether the macro block is contained in a moving region. '1' is indicative of a moving region. In this embodiment, an absolute value of either of elements (MVX<sub>i,j</sub>, MVY<sub>i,j</sub>) being equal to or more than 1 is indicative of a moving region.

[0071] The data structures of H.261 and MPEG4 are as described above. The flowchart common to the first embodiment and second embodiment is next explained with FIG.9.

[0072] First, all i and j of PERIOD<sub>i,j</sub> are set at 0 by initialization. This data concerns the intra-inter coding control on a macroblock-by-macroblock basis.

[0073] Next, according to the steps of reconstruction of the system-A image (H.261 or MPEG-4) and of generation of intermediate data, a reproduced image and intermediate data of NPTYPE, Pcontent, PTTYPE, TR, CD<sub>i,j</sub>, CBP<sub>i,j,k</sub>, QUANT<sub>i,j</sub>, MTYPE<sub>i,j</sub>, (MVX<sub>i,j</sub>, MVY<sub>i,j</sub>), and MOV<sub>i,j</sub> is generated.

[0074] Herein, the basic principle of the transcoder for all the embodiments are as follows:

[0075] Basic principle 1: Among the side information generated in the system-A decoding, PTTYPE, TR, CD<sub>i,j</sub>, CBP<sub>i,j,k</sub>, QUANT<sub>i,j</sub>, and MTYPE<sub>i,j</sub> are basically all shifted to the system-B coding mode to use. It is thus possible to prevent the accumulated image quality deterioration due to requantization.

[0076] In addition, some of the side information generated in the system-A decoding is changed for the rate control. The method of the change is described later.

[0077] Basic principle 2: Motion vector data (MVX<sub>i,j</sub> and MVY<sub>i,j</sub>) is used as reference data in the system-B recoding. In other words, when the value of the motion vector is fixed, re-searching a position that minimizes the differential between macro blocks as a motion vector is performed in the vicinity of the fixed value, while the search is performed from (0,0) when 'U'.

[0078] In FIG.9, after the intermediate data is generated, the flow goes to the branching.

[0079] When the coding mode of the present frame is the inter-coding mode, the coding mode of the next frame is the intra-coding mode, and the buffer loaded code amount (Bcontent in the figure) is as follows:

Pcontent(Accumulated code amount of the frame) > half the buffer capacity,

the present input frame is abandoned, the coding thereof is discontinued, and the next frame is intra-coded.

[0080] Further, the same processing as described above is performed in the case where a decoding side instructs to forcibly intra-code the next frame. When an error occurs, the decoding side instructs to forcibly intra-code the next frame.

[0081] In the MC-DCT coding, the intra-coded frame, called 'I' picture, is important. It is because frames succeeding the 'I' picture cannot be decoded without the 'I' picture. Meanwhile, when the capacity left in the output buffer is relatively small, the execution of recoding according to the above-mentioned basic principle 1 causes a risk that data overflows the output buffer in recoding the 'I' picture. When the 'I' picture is not coded due to the overflow, the image quality deteriorates.

[0082] Then, NPTYPE of the successive frame succeeding the present input frame is pre-read, and the coding processing in the system B is switched corresponding to NPTYPE of the successive frame and a current buffer loaded code amount (Bcontent). In other words, when the successive frame is the 'I' picture, and there is a possibility that data overflows the output buffer when the 'I' picture is recoded, the present input frame ('P' picture) is abandoned to ensure the capacity of the output buffer for the 'I' picture that is the successive frame to be recoded. This concept is shown in FIG.9.

[0083] In addition, in H.261, since a mode indication indicative of intra or inter coding is not at a head of a frame, the conditional branching in FIG.9 is applicable only to the transformation from MPEG-4 to H.261.

[0084] In FIG.9, the flow is 'no' in the conditional branching (always 'no' in the transformation from H.261 to MPEG-4), the flow goes to intra-inter coding mode control. With respect to the processing performed after this control, a first embodiment describes the transformation method from H.261 to MPEG-4, and a second embodiment describes the transformation method from MPEG-4 to H.261.



[0085] In the first embodiment, the transformation based on flowcharts illustrated in FIGS.9 to 11 is performed. Among process steps enclosed with bold lines in FIG.9, the intra-inter coding mode control (S1) is performed according to the flowchart illustrated in FIG.10, and change of coding data on a macroblock-by-macroblock basis for the rate control (S2) is performed according to the flowchart illustrated in FIG.11.

5 [0086] Herein, it is assumed that, as conditions for the rate control, a coding rate of H.261 is 64 kbps, a coding rate of MPEG-4 is also 64 kbps, and that a buffer size of the output buffer is 6.4 kbit.

[0087] In the intra-inter coding mode control illustrated in FIG. 10, when the H.261 data sequence is transformed to the MPEG-4 data sequence, the predetermined number (3 in this embodiment) of macro blocks are selected from macro blocks belonging a moving region in descending order of refreshing period, and the coding mode of the selected  
10 macro blocks are forcedly changed to the intra-coding mode.

[0088] According to the processing as described above, since intra-refreshing is performed on the macro blocks mainly belonging to the moving region, the error-resistance characteristic of the MPEG-4 bit-stream is improved. It is because when a transmission error occurs in a still picture region, the error is recovered by copying the result of the previous frame, causing image quality deterioration in the moving region.

15 [0089] FIG.11 illustrates the processing steps for recoding the macro blocks judged as the inter-coding mode. AS a motion prediction, the processing shown in the basic principle 2 of the transcoder is performed.

[0090] At this stage, VAR and VAROR are computed. In addition, VAR is a mean square of motion compensated inter-block differential pixels (luminance variance), and indicates power of inter-frame differential signal, while VAROR is a mean square of input image intra-block pixels (luminance variance), and indicates power of intra-frame signal.

20 [0091] RM8 (described in the previously-described cited reference) typical as a model of H.261 coder determines whether the coding mode of a macro block is inter or intra coding mode using the VAR and VAROR. Specifically, the inter-coding is performed when  $VAR < 64$ , i.e., a power level of the inter-frame differential signal is absolutely small, or  $VAR < VAROR$ , i.e., the power level of the inter-frame differential signal is smaller than the power level of the intra-frame signal.

25 [0092] In the inter-coding, the rate control is performed to adjust a generated code amount so that the buffer loaded code amount (Bcontent) comes close to a scheduled code amount. In this embodiment, the scheduled code amount is computed based on the following equation:

$$\text{Scheduled code amount} = P_{\text{content}} \times (\text{MPEG-4 coding rate} / \text{H.261 coding rate}) \times \text{the number of currently processed macro blocks} / \text{the total number of macro blocks}$$

30

[0093] In this embodiment, the coding rates are both 64 kbps, (MPEG4 coding rate/H.261 coding rate) is 1 (=1).

35 [0094] Thus, since the scheduled code amount (in other words, target coded content) is computed based on Pcontent, it is possible to achieve originally performed rate control, while maintaining the quantization control in H.261 as much as possible. For example, the rate control is performed so that a ratio of code amounts on a coding-unit basis of data composing the system-A data sequence comes close to a ratio of code amounts on the coding-unit basis of data composing the system-B data sequence. As a result, the concept in constructing the system-A data sequence is maintained in the system-B data sequence after the transformation.

40 [0095] In addition, coefficient "r" that is a factor to be multiplied VAR is calculated based on the following equation:

$$r = \max (1.0, \text{scheduled code amount} / \text{generated code amount})$$

45 [0096] Therefore, VAR is more than 1 when the generated code amount is less than the scheduled code amount. Accordingly,  $VAR = VAR \cdot r$  is set to increase VAR in the case where the capacity left in the output buffer is relatively large (the generated code amount is less than the scheduled code amount), so that intra-coding modes are more selected, thus controlling the mode.

[0097] In general coder control, a quantization scale is decreased to improve the image quality when a bit rate is relatively high. In the system-transformation-coding according to the present invention, however, as described previously, since it is preferable not to change quantization characteristics as possible, the number of frames of the intra-coding mode (I picture) is increased with the change of quantization scale minimized. This processing improves the error-resistance characteristic for transmission failure such as packet loss. Generally, since it is considered that the coding efficiency of MPEG-4 is higher than that of H.261, in the transformation with the same coding rates, the above-described advantage is obtained by controlling to adopt more intra-coding modes within a range of the capacity left in the output buffer.

55 [0098] In addition, the final step in the flowchart illustrated in FIG. 11 is the control for QUANTi, j. In RM8, the quantization scale is obtained in the following equation in the case of 64 kbps:

$$\text{Quantization scale} = 2 \times \text{int}(\text{buffer loaded code amount} [\text{bit}] / 200 + 2$$

[0099] Controlling the quantization scale based on the above equation achieves the feedback control that the quantization scale is increased when the buffer loaded code amount is increased, thus decreasing the generated code amount.

[0100] In this embodiment, in consideration of the relationship between the accumulation of quantization errors and generated bit contents, the quantization scale is changed as follows:

buffer loaded code amount > 70% of buffer capacity quantization scale =  $\text{QUANT}_{i,j} \times 2$

buffer loaded code amount > 80% of buffer capacity quantization scale =  $\text{QUANT}_{i,j} \times 3$

buffer loaded code amount > 90% of buffer capacity quantization scale =  $\text{QUANT}_{i,j} \times 4$

[0101] In addition, in MPEG-4, since a value of  $\text{QUANT}_{i,j}$  is only allowed to be changed by maximum 2 in neighboring macro blocks, the change scale is limited to maximum 2.

[0102] Thus, the coding mode is first controlled to make the buffer loaded code amount close to the target coded content, and when it is further necessary to change the quantization characteristic (quantization scale), the quantization scale in the system B is set to be integer times the quantization scale in the system A.

[0103] The first embodiment, as described above, achieves an example of methods for performing the rate control, while maintaining the quantization characteristics performed before the system is transformed.

[0104] In addition, when the capacity left in the output buffer is relatively large, the number of macro blocks to be intra-coded is increased by redefining the value of VAR, according to this embodiment. However, it may be also possible to increase or decrease a value N of intra-refreshing of a macro block belonging to a moving region.

[0105] The second embodiment is next described.

[0106] The second embodiment describes the transformation method from MPEG-4 to H.261. The transformation operations in this embodiment are performed based on flowcharts illustrated in FIGS.9, 12 and 13.

[0107] Among processing steps enclosed with bold lines, the intra-inter coding mode control is performed according to the flowchart in FIG.12, and the change of coding data on a macroblock-by-macroblock for the rate control is performed according to the flowchart in FIG. 13.

[0108] The difference of this embodiment from the first embodiment is mainly explained to simplify the explanation.

[0109] Herein, it is assumed that macro blocks more than needed are intra-coded to improve the error resistance although the coding efficiency of MPEG-4 is higher than that of H.261.

[0110] In the control for the intra-inter coding mode illustrated in FIG.12, coding modes of intra-coded macro blocks are set at 'U' (unfixed) except macro block with the maximum  $\text{PERIOD}_{i,j}$ , or macro block with  $\text{PERIOD}_{i,j}$  exceeding the total number of macro blocks (99). Thus, even in the case where the coding mode of the present frame is the inter-frame coding mode, minimum intra-coded macro blocks are only left, and coding modes of other intra-coded macro blocks are set at 'U' (unfixed). As a result, the case occurs that the other intra-coded macro blocks are inter-coded again in next step (FIG.13).

[0111] In the case where data is transformed from the system B of which the coding efficiency is high to the system A of which the coding efficiency is relatively low, when I pictures (intra-coded pictures) contained in the system-B data sequence B are all transformed to data in the system-A data sequence, there is a possibility that data overflows the output buffer because the code amount of an I picture is larger than that of a P picture (inter-coded picture). In this embodiment, the number of macro blocks to be intra-coded is decreased to prevent the overflow in the buffer without controlling the quantization scale. In other words, the number of macro blocks to be inter-coded is relatively increased.

[0112] The judgement of intra-inter coding illustrated in FIG.13 is a general judgement method with VAR and VAROR described in RM8.  $\text{QUANT}_{i,j}$  control that is the final step in FIG.13 is the same as in the first embodiment, and the explanation thereof is omitted.

[0113] According to the second embodiment, in the system transformation to H.261 of which the coding efficiency is generally considered to be less than that of MPEG-4, intra-coded macro blocks are changed to inter-coded macro blocks while changing the coding mode, thereby making it possible to prevent the overflow in the buffer without controlling the quantization scale for other macro blocks.

[0114] Two embodiments for an image coding transformation apparatus are next described. FIG.14 illustrates a conceptual diagram of a transcoder common to a third embodiment and fourth embodiment, and the method in FIG.9 is achieved therein.

[0115] Intermediate data described in FIG.8 is stored in frame coding mode memory 406, motion vector memory 407, macro block coding memory 408 and rate control information memory 409. Coder control section 405 achieves the control described in FIG.9. In response to the control signal, frame coding mode changing section 410, and macro block

coding mode changing section 411 each performs the change.

[0116] FIG. 14 illustrates a configuration where data of PTYPE, TR, CDi,j, CBPi,j,k, QUANTi,j, and MTYPEi,j is provided to a coder with the system B without being changed unless coder controller 405 transmits a control signal.

[0117] The details of FIG. 14 are illustrated in FIG. 15, which illustrates an apparatus corresponding to the method of the first embodiment as a third embodiment. In FIG. 15, 501 is a variable length decoding section, 502 is an inverse quantization section that performs inverse quantization, 503 is an inverse DCT section that performs inverse DCT processing, 504 is an adder, 505 is a frame memory, 506 is a motion compensation section that performs processing for motion compensation, and 507 is a loop filter, thus composing an H.261 decoder. A decoded image is provided to a MPEG-4 coder through frame memory 505.

[0118] 508 is a subtracter, 509 is a DCT section that performs DCT calculation, 510 is a quantization section that quantizes DCT coefficients, 513 is an adder, 514 is a frame memory, 515 is a motion prediction and motion compensation section that performs motion prediction and motion compensation, 516 is a variable length coding section, and 517 is an output buffer, thus composing a MPEG-4 coder.

[0119] 518 is a MPEG-4 rate control section, and achieves the control described in FIGS. 9, 10 and 11. Intermediate data is stored in rate control data memory 519, macro block coding mode memory 520, and frame coding mode memory 521. The MPEG-4 coder is controlled, while receiving the data of PTYPE, TR, CDi,j, CBPi,j,k, QUANTi,j and MTYPEi,j among the intermediate data. More specifically, block mode changing section 522 changes the coding mode of a macro block, and the intra-inter mode changing section controls the predictive coding based on the data of PTYPE and MTYPE.

[0120] In addition, mode data is multiplexed in variable length coding section 516 to be output to an output buffer, which is not shown in the figure to be simplified.

[0121] A fourth embodiment is next explained with FIG. 16.

[0122] An apparatus of the fourth embodiment performs the transformation from MPEG-4 to H.261, inversely to the apparatus of the third embodiment. In FIG. 16, 601 is a variable length decoding section, 602 is an inverse quantization section, 603 is an inverse DCT section, 604 is an adder, 605 is a frame memory, and 606 is a motion compensation section, thus composing a MPEG-4 decoder.

[0123] A decoded image is provided to an H.261 coder through frame memory 605.

[0124] 607 is a subtracter, 608 is a DCT section, 609 is a quantization section, 610 is an inverse quantization section, 611 is an inverse quantization section, 612 is an adder, 613 is a frame memory, 614 is a motion prediction and motion compensation section, 615 is a loop filter, 616 is a variable length coding section, and 617 is an output buffer, thus composing the H.261 coder. 618 is an H.261 rate control section, and achieves the control described in FIGS. 9, 12 and 13. Intermediate data is stored in rate control data memory 619, macro block coding mode memory 620, and frame coding mode memory 621. The H.261 coder is controlled, while receiving the data of PTYPE, TR, CDi,j, CBPi,j,k, QUANTi,j and MTYPEi,j among the intermediate data. More specifically, block mode changing section 622 changes the coding mode of a macro block, and the intra-inter mode changing section controls the predictive coding based on the data of PTYPE and MTYPE. In addition, mode data is multiplexed in variable length coding section 623 to be output to an output buffer, which is not shown in the figure to be simplified.

[0125] Two embodiments for the image coding transformation methods as described in claims 6 to 10 are as described above.

[0126] The scope of the present invention includes computer program products that are recording media in which a program, loadable with a computer, for achieving the present invention is stored. The recording media include discs such as a floppy disc, optical disc, CD-ROM and magnetic disc, ROM, RAM, EPROM, EEPROM, and magnetic or optical card. The present invention is, however, not limited to such media in particular. Further, it may be possible to record the program in a recording medium to transfer to a worldwide terminal, or forward the program (distribute with encryption) via a communication channel such as the internet, thereby achieving the present invention in a computer and portable information terminal.

[0127] The present invention is not limited to the above described embodiments, and various variations and modifications may be possible without departing from the scope of the present invention.

[0128] This application is based on the Japanese Patent Application No. HEI11-047613 filed on February 25, 1999, entire content of which is expressly incorporated by reference herein.

## Claims

1. A method for transforming a first data sequence generated by a first moving picture coding system having an intra-frame coding mode and an inter-frame coding mode to a second data sequence generated by a second moving picture coding system having an intra-frame coding mode and an inter-frame coding mode, comprising:

prereading a coding mode of a successive frame succeeding a present frame from said first data sequence;

judging whether or not a preread coding mode of said successive frame is the intra-frame coding mode, and determining whether or not to code said present frame by said second moving picture coding system corresponding to a generated code amount of said second data sequence in the case where the coding mode of said successive frame is the intra-frame coding mode, wherein data coded by the intra-frame coding mode existing in said first data sequence is preferentially transformed to said second data sequence.

2. The method according to claim 1, further comprising:

abandoning said present frame to skip to said successive frame when said generated code amount of said second data sequence has been exceed a predetermined value in the case where the coding mode of said successive frame is the intra-frame coding mode.

3. The method according to claim 2, further comprising:

writing said second data sequence generated by said second moving picture coding system in an output buffer(404);  
wherein as said generated code amount of said second data sequence, a buffer loaded code amount of said output buffer(404) is used.

4. The method according to claim 1 to claim 3, further comprising:

recording a code amount on a coding-unit basis in reading data on the coding-unit basis from said first data sequence;  
determining a target value of said generated code amount of said second data sequence on the coding-unit basis, said target value being obtained by multiplying a recorded code amount by a factor; and  
performing a rate control so that said generated code amount of said second data sequence comes close to said target value in generating said second data sequence from said data on the coding-unit basis by said second moving picture coding system,  
wherein a ratio of code amounts, on the coding-unit basis, of data composing said first data sequence is made close to a ratio of code amounts, on the coding-unit basis, of data composing said second data sequence corresponding to said first data sequence.

5. The method according to claim 1 to claim 4, further comprising:

acquiring a quantization scale used in quantizing data in said first moving picture coding system when said data is read from said first data sequence; and  
changing a quantization scale in said second moving picture coding system to integer times the acquired quantization scale in the case where said generated code amount of said second data sequence is adjusted in coding said present frame by said second moving picture coding system.

6. The method according to claim 1 to claim 4, further comprising:

changing a quantization scale in said second moving picture coding system in the case where said present frame is coded by said second moving picture coding system and said generated code amount of said second data sequence is adjusted.

7. A method for transforming a first data sequence generated by a first moving picture coding system to a second data sequence generated by a second moving picture coding system, comprising:

recording a code amount of a coding-unit in reading data of the coding-unit from said first data sequence;  
determining a target value of said generated code amount of said second data sequence on a coding-unit basis, said target value being obtained by multiplying a recorded code amount by a factor; and  
performing a rate control so that said generated code amount of said second data sequence comes close to said target value in generating said second data sequence from said data of the coding-unit with said second moving picture coding system,  
wherein a ratio of code amounts, on the coding-unit basis, of data composing said first data sequence is made close to a ratio of code amounts, on the coding-unit basis, of data composing said second data sequence corresponding to said first data sequence.

8. The method according to claim 7, wherein said coding-unit is comprised of at least one frame.

9. A method for transforming a first data sequence generated by a first moving picture coding system that switches an intra-frame coding mode and an inter-frame coding mode on a block unit basis to a second data sequence generated by a second moving picture coding system that switches an intra-frame coding mode and an inter-frame coding mode on the block unit basis, comprising:

increasing the number of blocks to be coded by the intra-frame coding mode in said second moving picture coding system in the case where a generated code amount of said second data sequence does not reach a target value.

10. The method according to claim 9, further comprising:

recording a code amount on a block unit basis in reading data on the block unit basis from said first data sequence; and  
using a value obtained by multiplying said code amount recorded on the block unit basis by a factor, as a target value of said generated code amount of said second data sequence.

11. The method according to claim 9 or claim 10, further comprising:

acquiring a quantization scale used in quantizing data in said first moving picture coding system when said data is read from said first data sequence; and  
changing a quantization scale in said second moving picture coding system to integer times the acquired quantization scale in the case where said generated code amount of said second data sequence is adjusted in coding a present frame by said second moving picture coding system.

12. The method according to claim 9 to claim 11, wherein said block unit includes a frame or a macro block.

13. The method according to claim 9 to claim 12, further comprising:

redefining a luminance variance of a motion compensated inter-block differential so that the intra-frame coding mode is selected more to increase the number of blocks to be coded by the intra-frame coding mode.

14. The method according to claim 9 to claim 11, further comprising:

shortening a period of intra-refreshing of a macro block belonging to a moving region to increase the number of blocks to be coded by the intra-frame coding mode.

15. A method for transforming a first data sequence generated by a first moving picture coding system that switches an intra-frame coding mode and an inter-frame coding mode on a block unit basis to a second data sequence generated by a second moving picture coding system that switches the intra-frame coding mode and the inter-frame coding mode on the block unit basis, comprising:

increasing the number of blocks to be coded by the inter-frame coding mode in said second moving picture coding system in the case where a generated code amount of said second data sequence exceeds a target value.

16. The method according to claim 15, further comprising:

recording a code amount on the block unit basis in reading data on the block unit basis from said first data sequence;  
using a value obtained by multiplying said code amount recorded on the block unit basis by a factor, as a target value of said generated code amount of said second data sequence.

17. The method according to claim 15 or claim 16, further comprising:

acquiring a quantization scale used in quantizing data in said first moving picture coding system when said data is read from said first data sequence; and

changing a quantization scale in said second moving picture coding system to integer times the acquired quantization scale in the case where said generated code amount of said second data sequence is adjusted in coding said present frame by said second moving picture coding system.

- 5 18. A method for transforming a first data sequence generated by a first moving picture coding system with an information loss caused by quantization to a second data sequence generated by a second moving picture coding system with an information loss caused by quantization, comprising:

10 acquiring a quantization scale used in quantizing data in said first moving picture coding system when said data is read from said first data sequence; and  
changing a quantization scale in said second moving picture coding system to integer times the acquired quantization scale in the case where said generated code amount of said second data sequence is adjusted.

- 15 19. An apparatus for transforming a first data sequence generated by a first moving picture coding system having an intra-frame coding mode and an inter-frame coding mode to a second data sequence generated by a second moving picture coding system having an intra-frame coding mode and an inter-frame coding mode, comprising:

20 a system(405) that prereads a coding mode of a successive frame succeeding a present frame from said first data sequence;  
a system(405) that judges whether a preread coding mode of said successive frame is the inter-frame coding mode or the intra-frame coding mode, and  
a system(405) that determines whether or not to code said present frame by said second moving picture coding system corresponding to a generated code amount of said second data sequence in the case where the coding mode of said successive frame is the intra-frame coding mode, wherein data coded by the intra-frame coding mode existing in said first data sequence is preferentially transformed to the second data sequence.

- 25 20. An apparatus for transforming a first data sequence generated by a first moving picture coding system that switches an intra-frame coding and an inter-frame coding on block unit basis to a second data sequence generated by a second moving picture coding system that switches comprised an intra-frame coding and an inter-frame coding on the block unit basis,

30 said apparatus increases the number of blocks to be coded by the intra-frame coding mode in said second moving picture coding system in the case where a generated code amount of said data sequence does not reach a target value.

- 35 21. An apparatus for transforming a first data sequence generated by a first moving picture coding system that switches an intra-frame coding mode and an inter-frame coding mode on a block unit basis to a second data sequence generated by a second moving picture coding system that switches the intra-frame coding mode and the inter-frame coding mode on the block unit basis,

40 said apparatus increases the number of blocks to be coded by the inter-frame coding mode in said second moving picture coding system in the case where a generated code amount of said second data sequence exceeds a target value.

- 45 22. An apparatus for transforming a first data sequence generated by a first moving picture coding system with an information loss caused by quantization to a second data sequence generated by a second moving picture coding system with an information loss caused by quantization, comprising:

50 a system(522) that acquires a quantization scale used in quantizing data in said first moving picture coding system when said data is read from said first data sequence; and  
a system(522) that changes a quantization scale in said second moving picture coding system to integer times the acquired quantization scale in the case where said generated code amount of said second data sequence is adjusted.

- 55 23. A recording medium storing a program, readable by a computer, for transforming a first data sequence generated by a first moving picture coding system having an intra-frame coding mode and an inter-frame coding mode to a second data sequence generated by a second moving picture coding system having an intra-frame coding mode and an inter-frame coding mode, said program comprising:

a procedure for prereading a coding mode of a successive frame succeeding a present frame from said first data sequence;

a procedure for judging whether a preread coding mode of said successive frame is the intra-frame coding mode or the inter-frame coding mode, and

a procedure for determining whether or not to code said present frame by said second moving picture coding system corresponding to a generated code amount of said second data sequence in the case where the coding mode of said successive frame is the intra-frame coding mode.

24. A recording medium storing a program, readable by a computer, for transforming a first data sequence generated by a first moving picture coding system to a second data sequence generated by a second moving picture coding system, said program comprising:

a procedure for recording a code amount on a coding-unit basis in reading data on the coding-unit basis from said first data sequence;

a procedure for determining a target value of said generated code amount of said second data sequence on the coding-unit basis, said target value being obtained a recorded code amount by a factor; and

a procedure for controlling a rate so that said generated code amount of said second data sequence comes close to said target value in generating said second data sequence from said data on the coding-unit basis by said second moving picture coding system,

wherein a ratio of code amounts, on the coding-unit basis, of data composing said first data sequence is made close to a ratio of code amounts, on the coding-unit basis, of data composing said second data sequence corresponding to said first data sequence.

25. A recording medium storing a program, readable by a computer, for transforming a first data sequence generated by a first moving picture coding system that switches an intra-frame coding mode and an inter-frame coding mode on block unit basis to a second data sequence generated by a second moving picture coding system that switches an intra-frame coding mode and an inter-frame coding mode on the block unit basis, said program comprising:

a procedure for increasing the number of blocks to be coded by the intra-frame coding mode in said second moving picture coding system in the case where a generated code amount of said data sequence does not reach a target value.

26. A recording medium storing a program, readable by a computer, for transforming a first data sequence generated by a first moving picture coding system that switches an intra-frame coding mode and an inter-frame coding mode on a block unit basis to a second data sequence generated by a second moving picture coding system that switches an intra-frame coding mode and an inter-frame coding mode on the block unit basis, said program comprising:

a procedure for increasing the number of blocks to be coded by the inter-frame coding mode in said second moving picture coding system in the case where a generated code amount of said second data sequence exceeds a target value.

27. A recording medium storing a program, readable by a computer, for transforming a first data sequence generated by a first moving picture coding system with an information loss generated by quantization to a second data sequence generated by a second moving picture coding system with an information loss generated by quantization, said program comprising:

a procedure for acquiring a quantization scale used in quantizing data in said first moving picture coding system when said data is read from said first data sequence; and

a procedure for changing a quantization scale in said second moving picture coding system to integer times the acquired quantization scale in the case where said generated code amount of said second data sequence is adjusted.

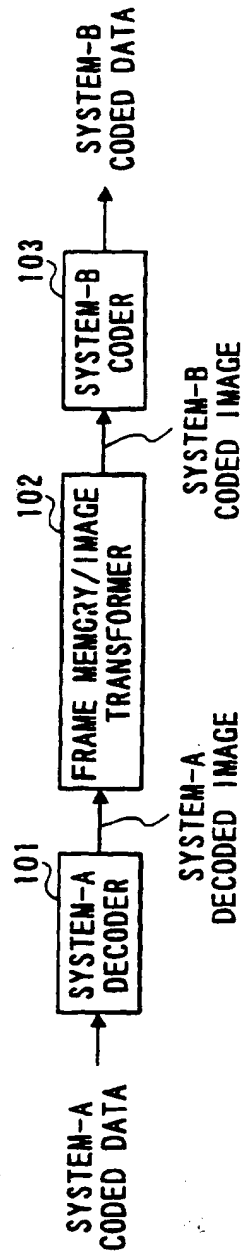


FIG. 1



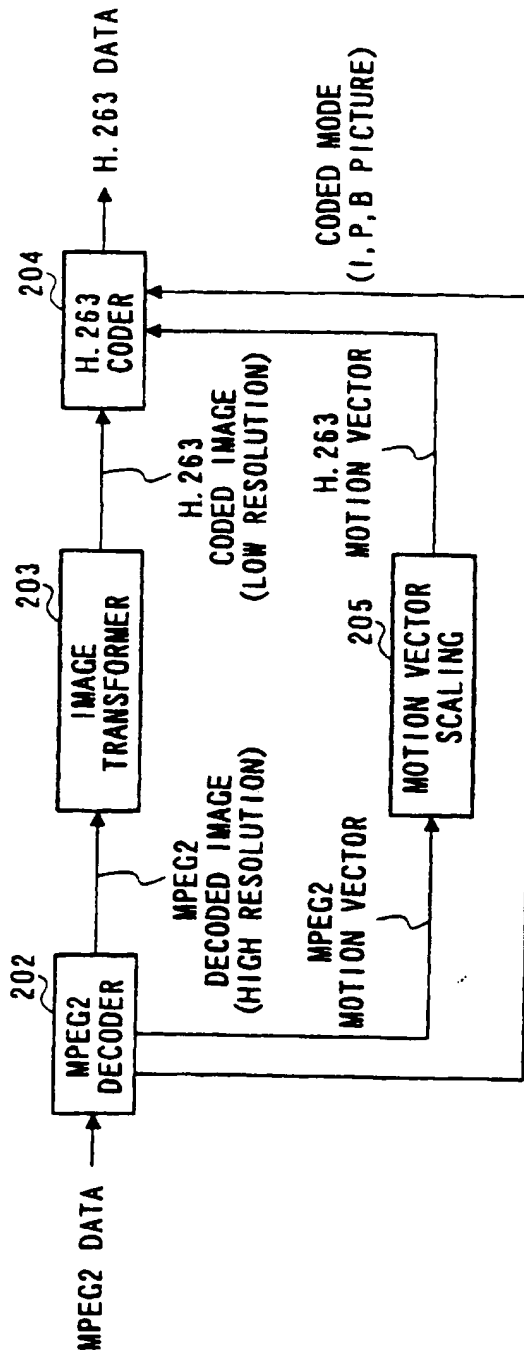


FIG. 2

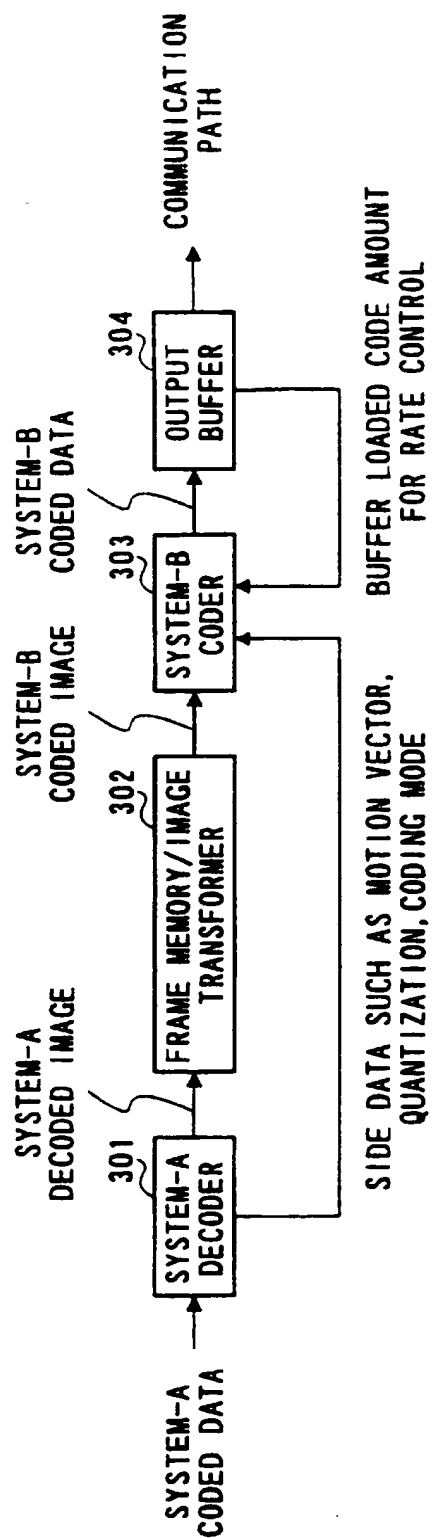


FIG. 3

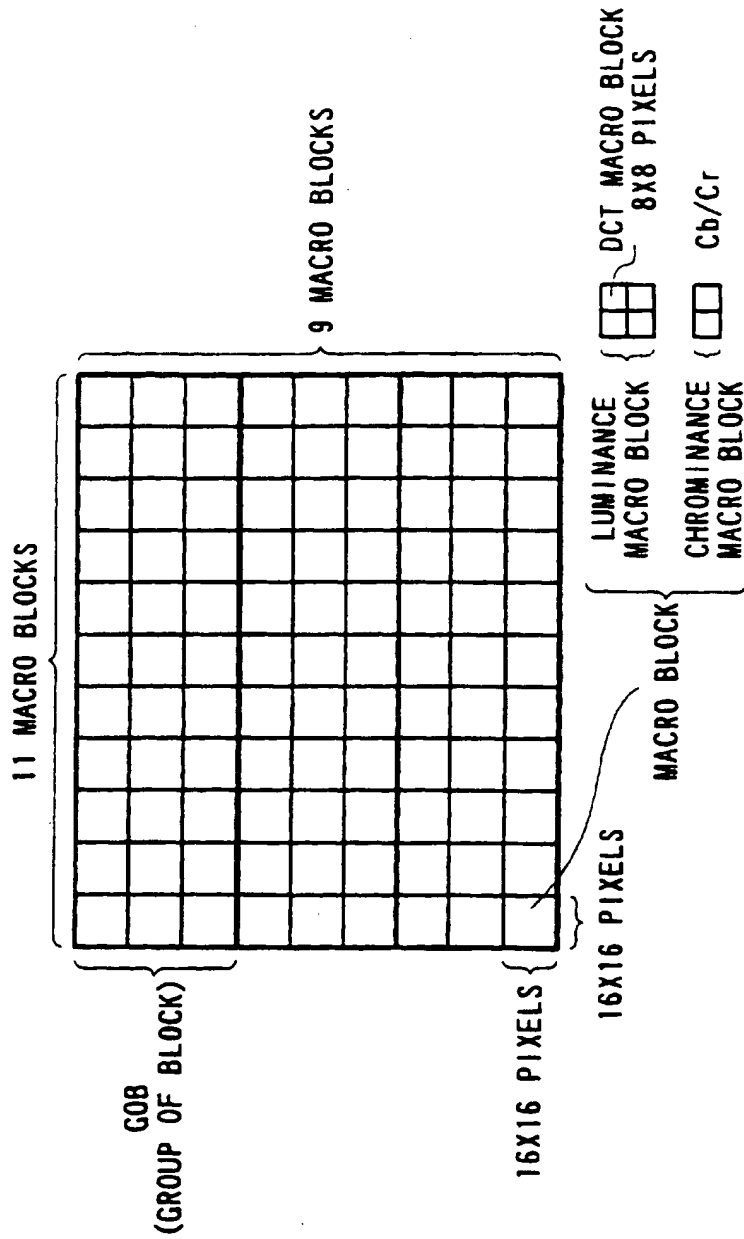


FIG. 4

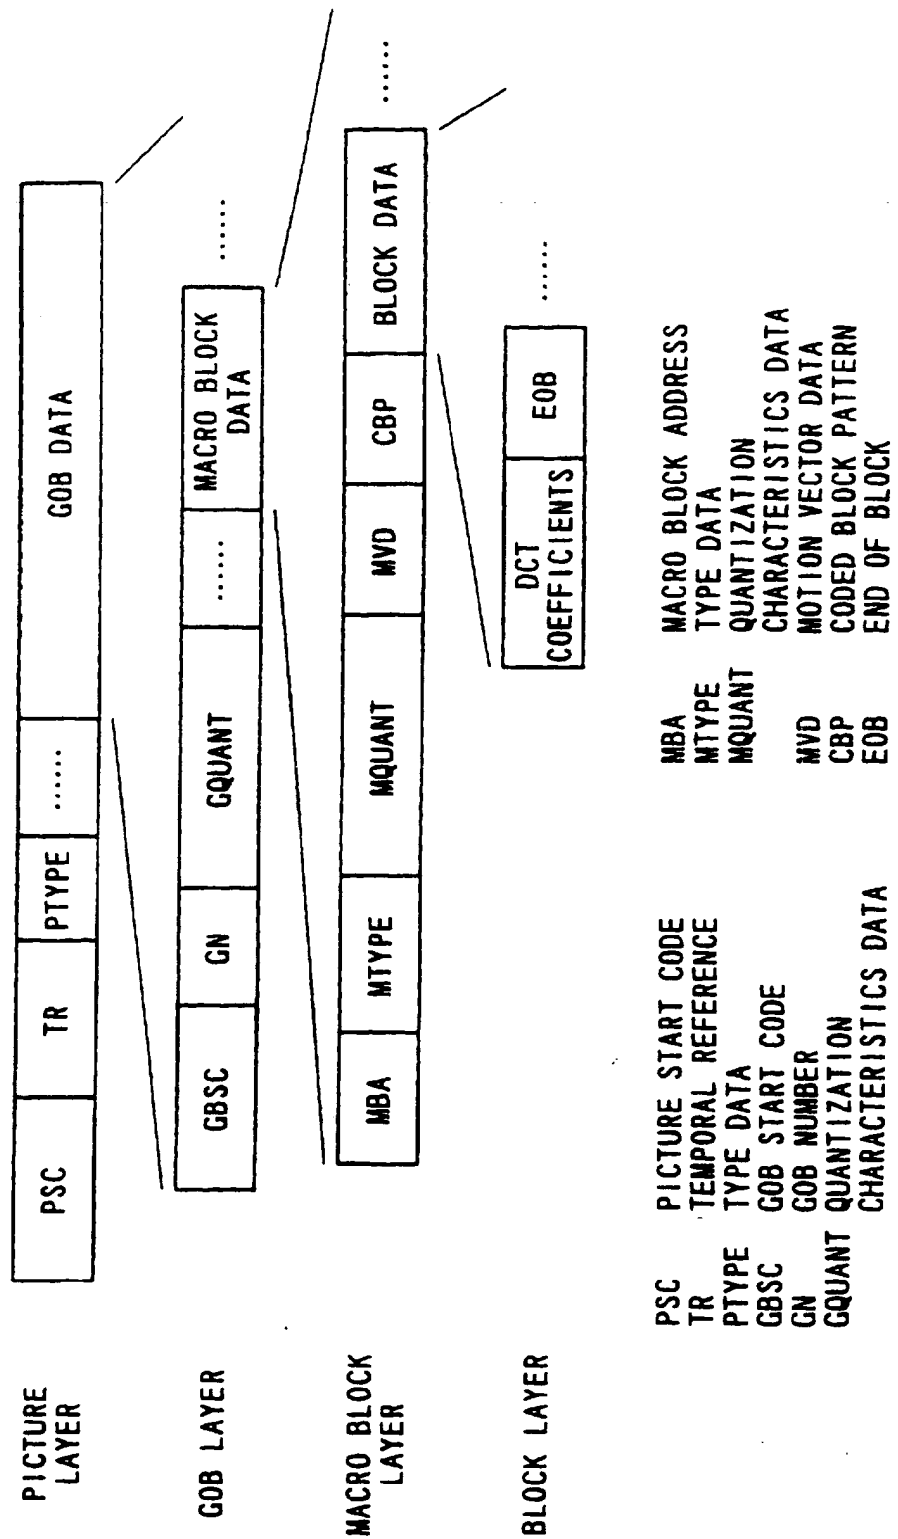


FIG. 5

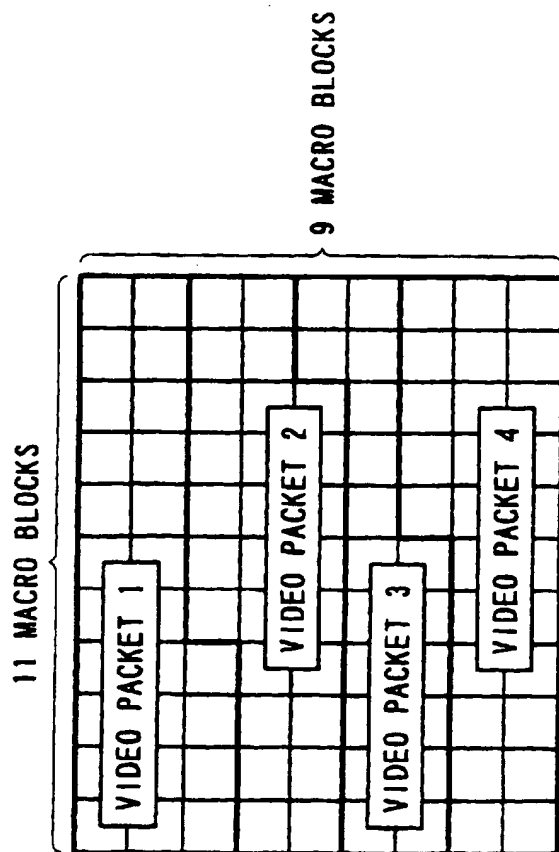


FIG. 6

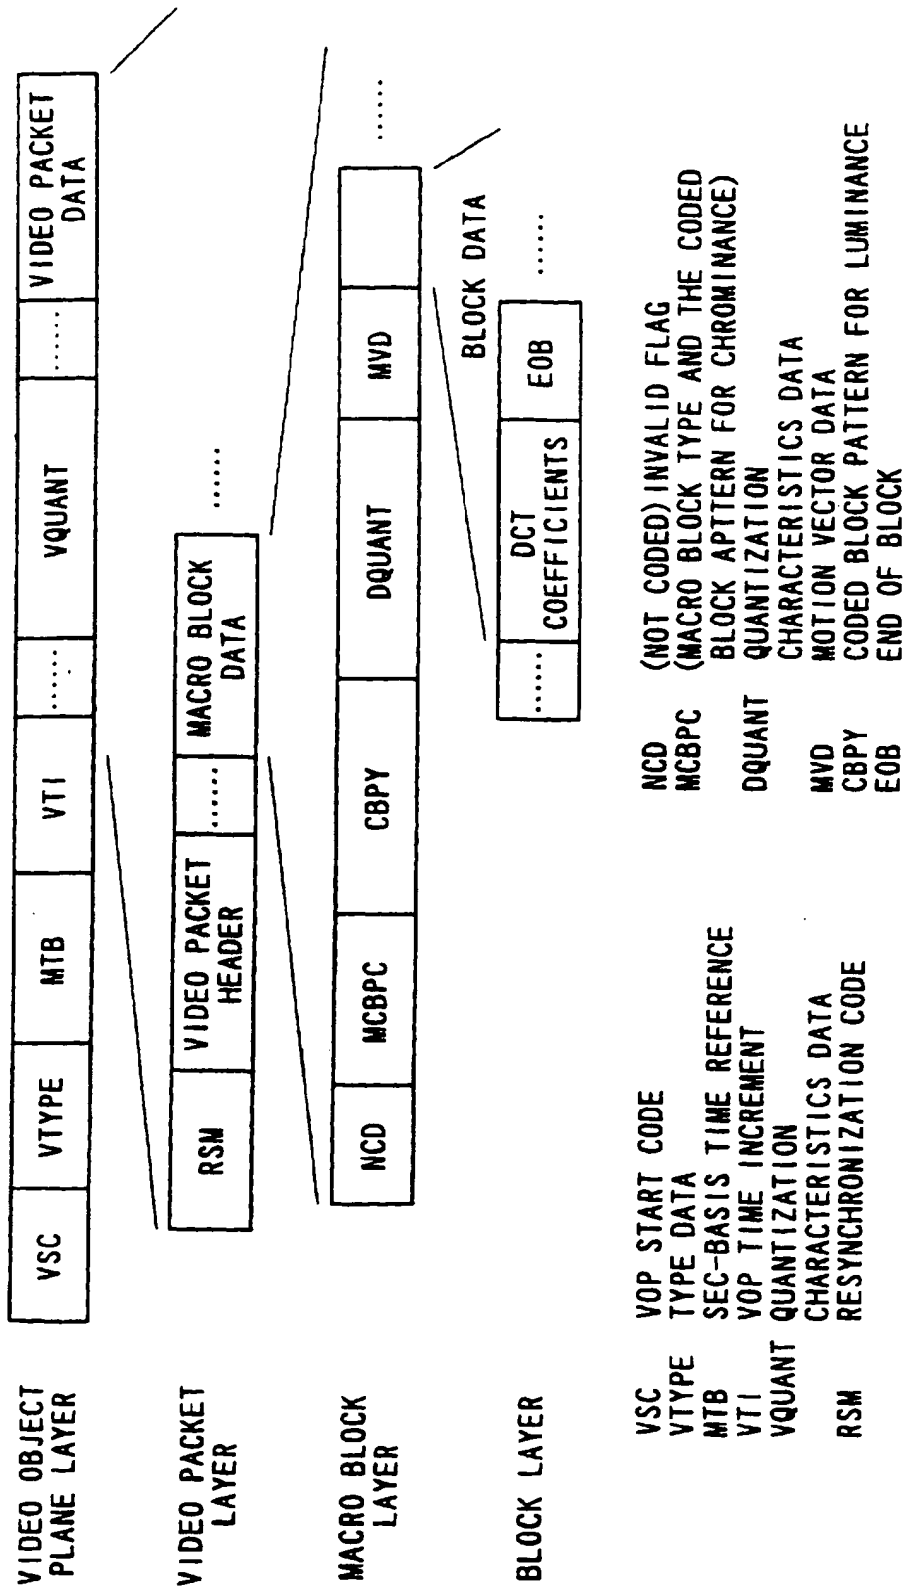


FIG. 7

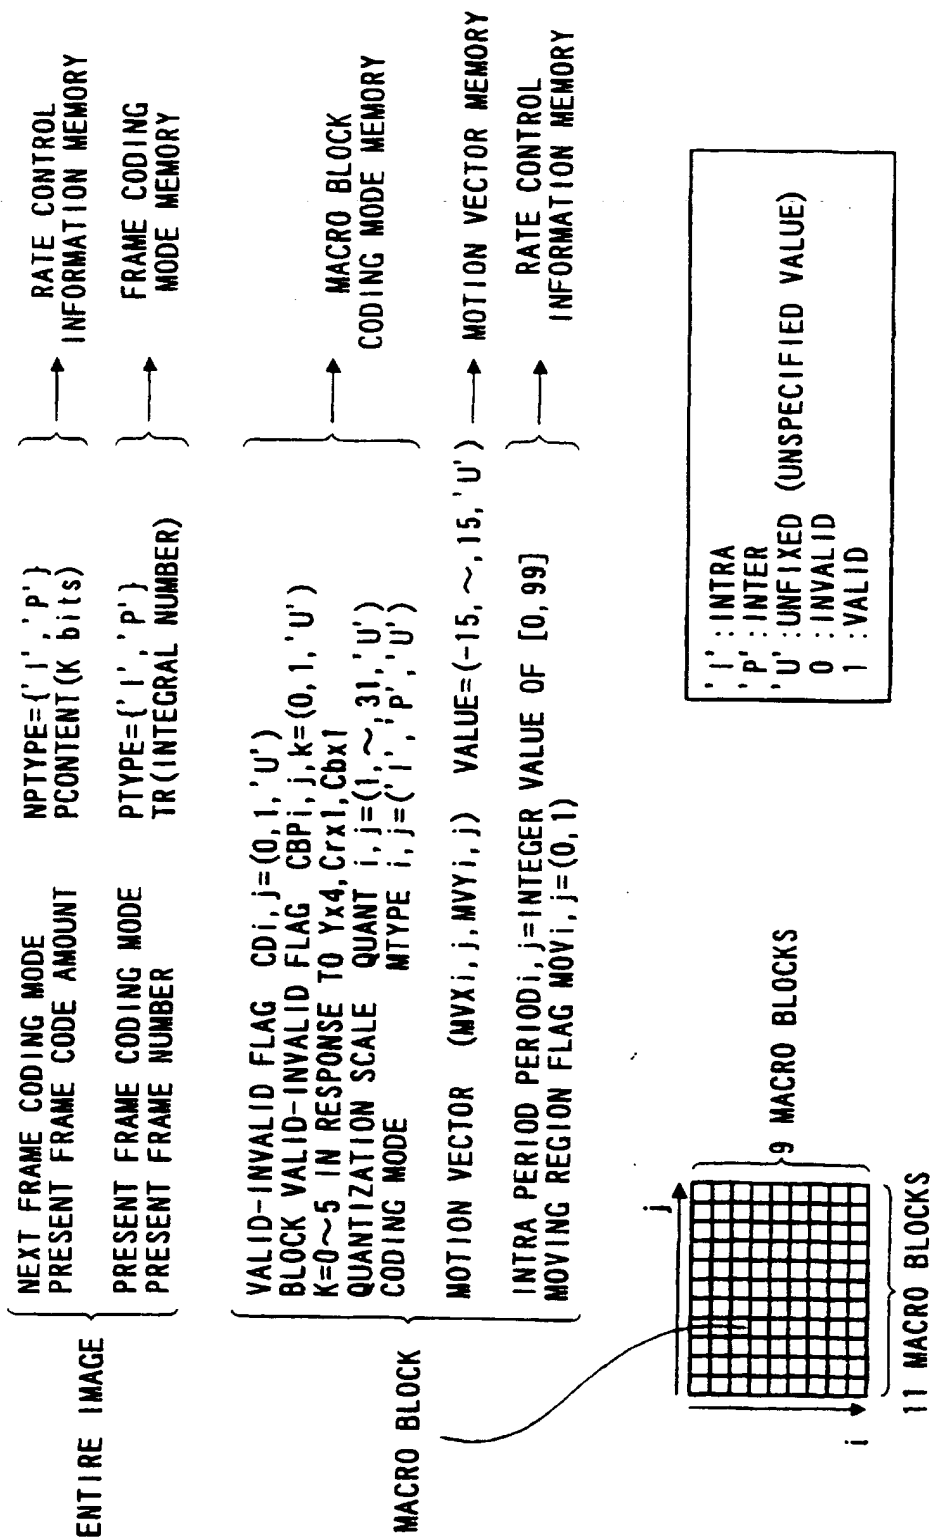


FIG. 8

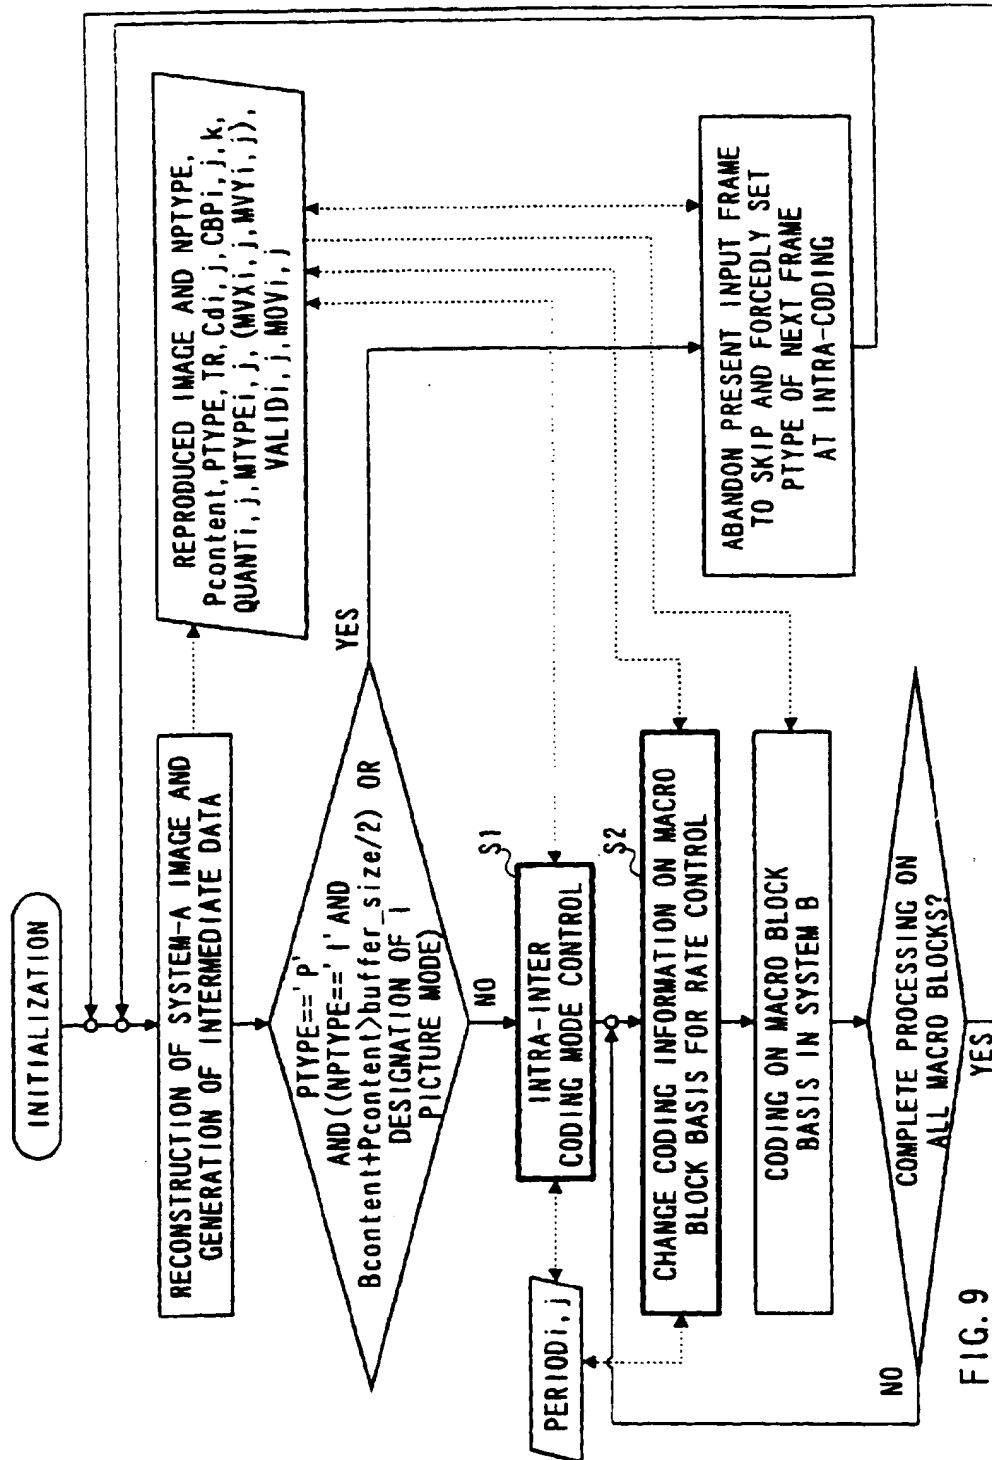


FIG. 9



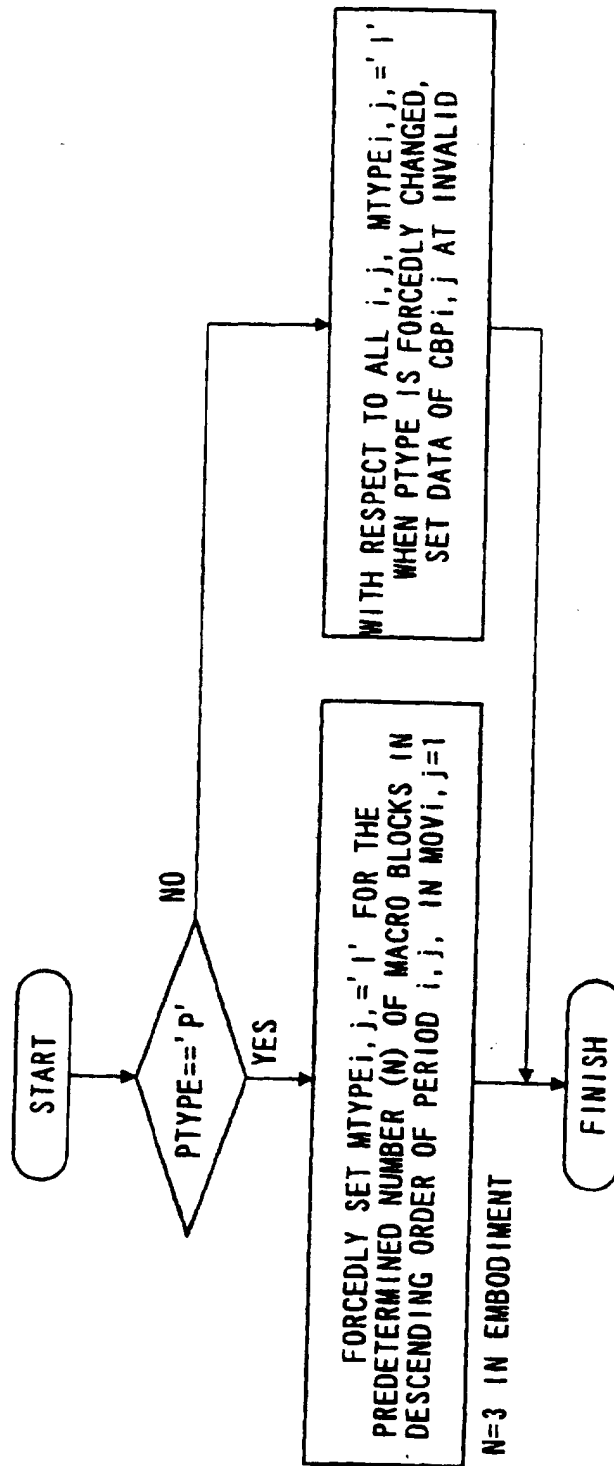


FIG. 10


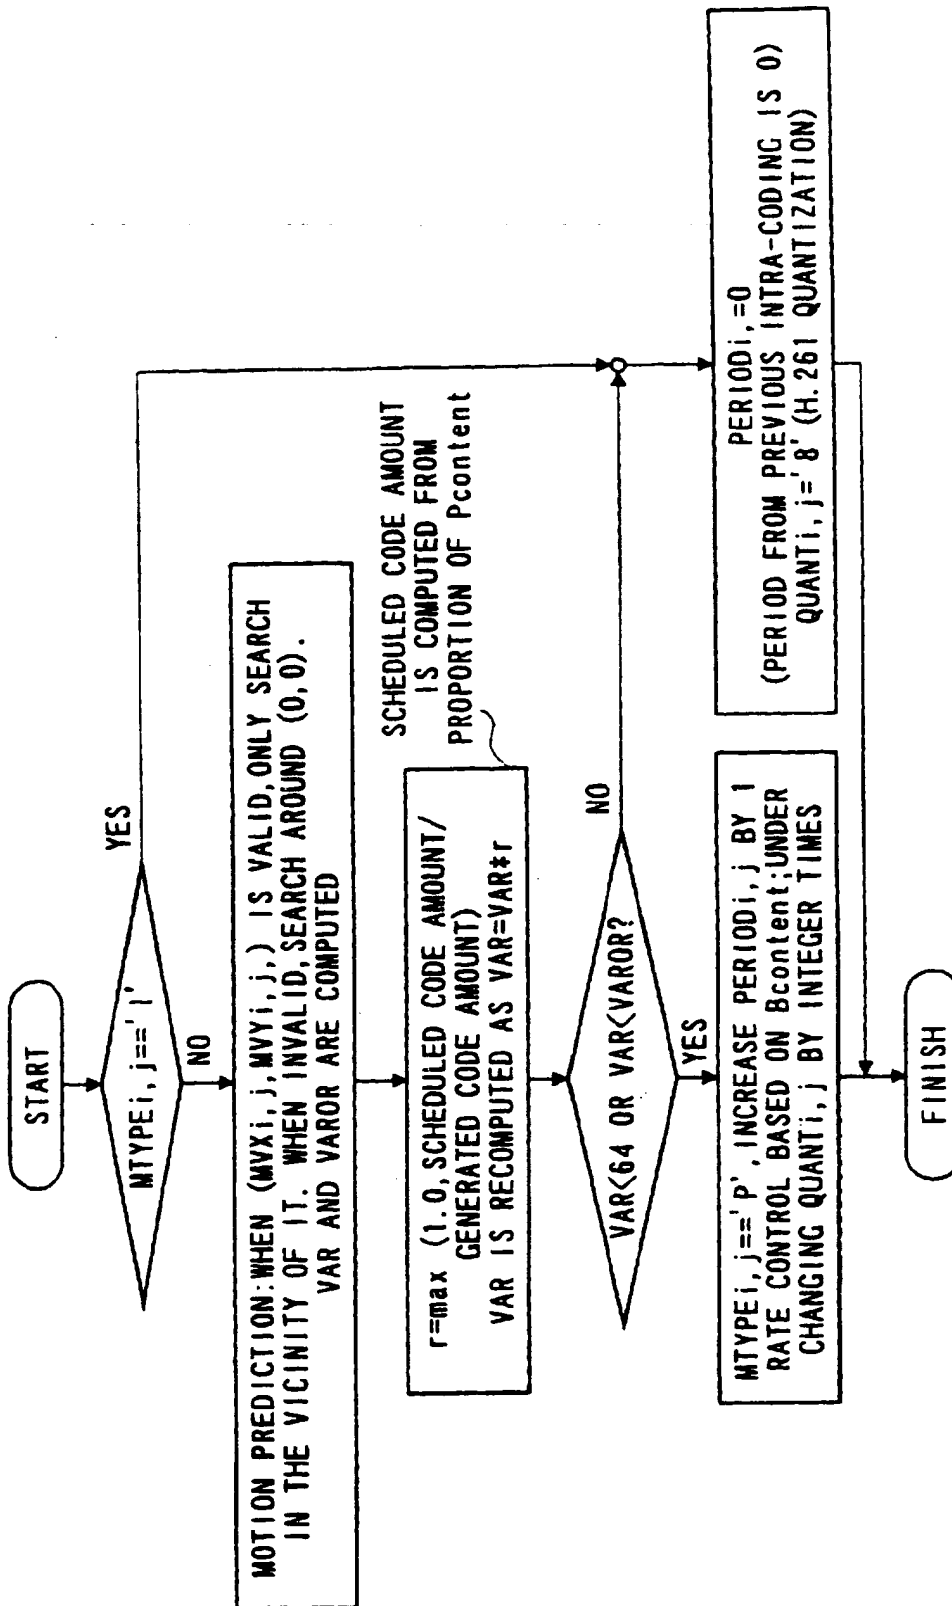


FIG. 11

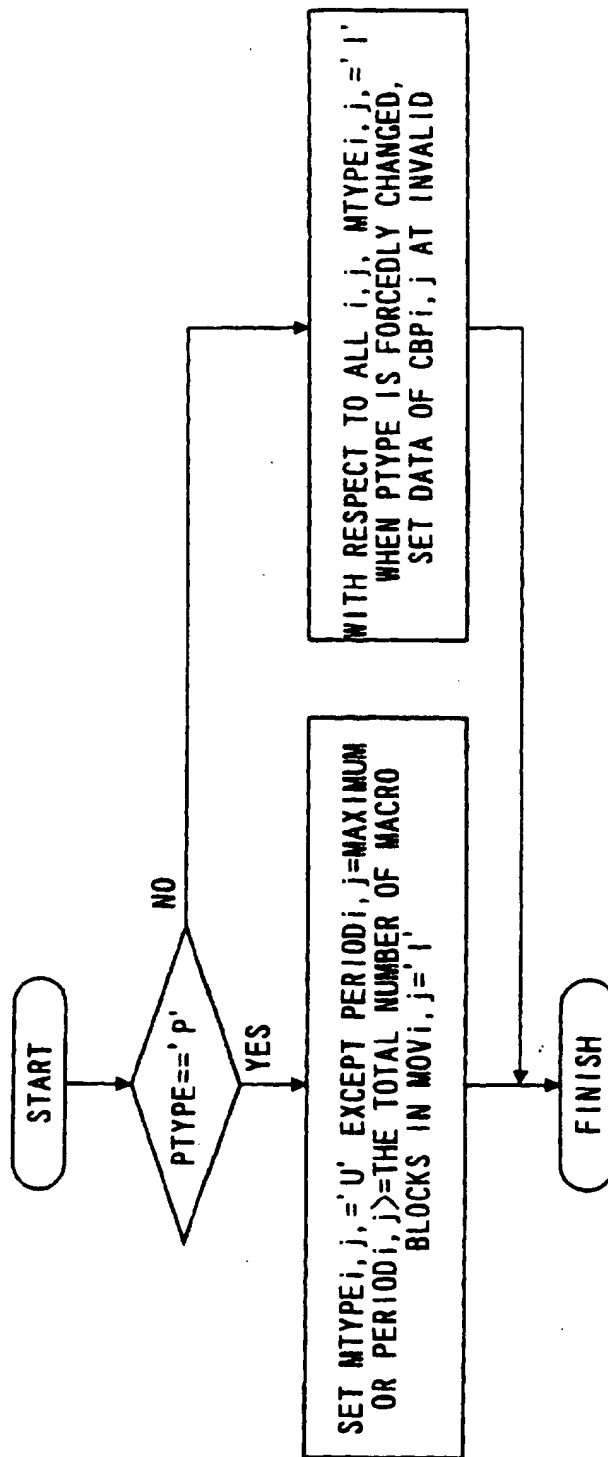

THE TOTAL NUMBER OF MACRO BLOCKS IS 99 IN EMBODIMENT  
(SMALLER THAN 132; INTRA-REFRESHING PERIOD UPPER LIMIT)

FIG. 12

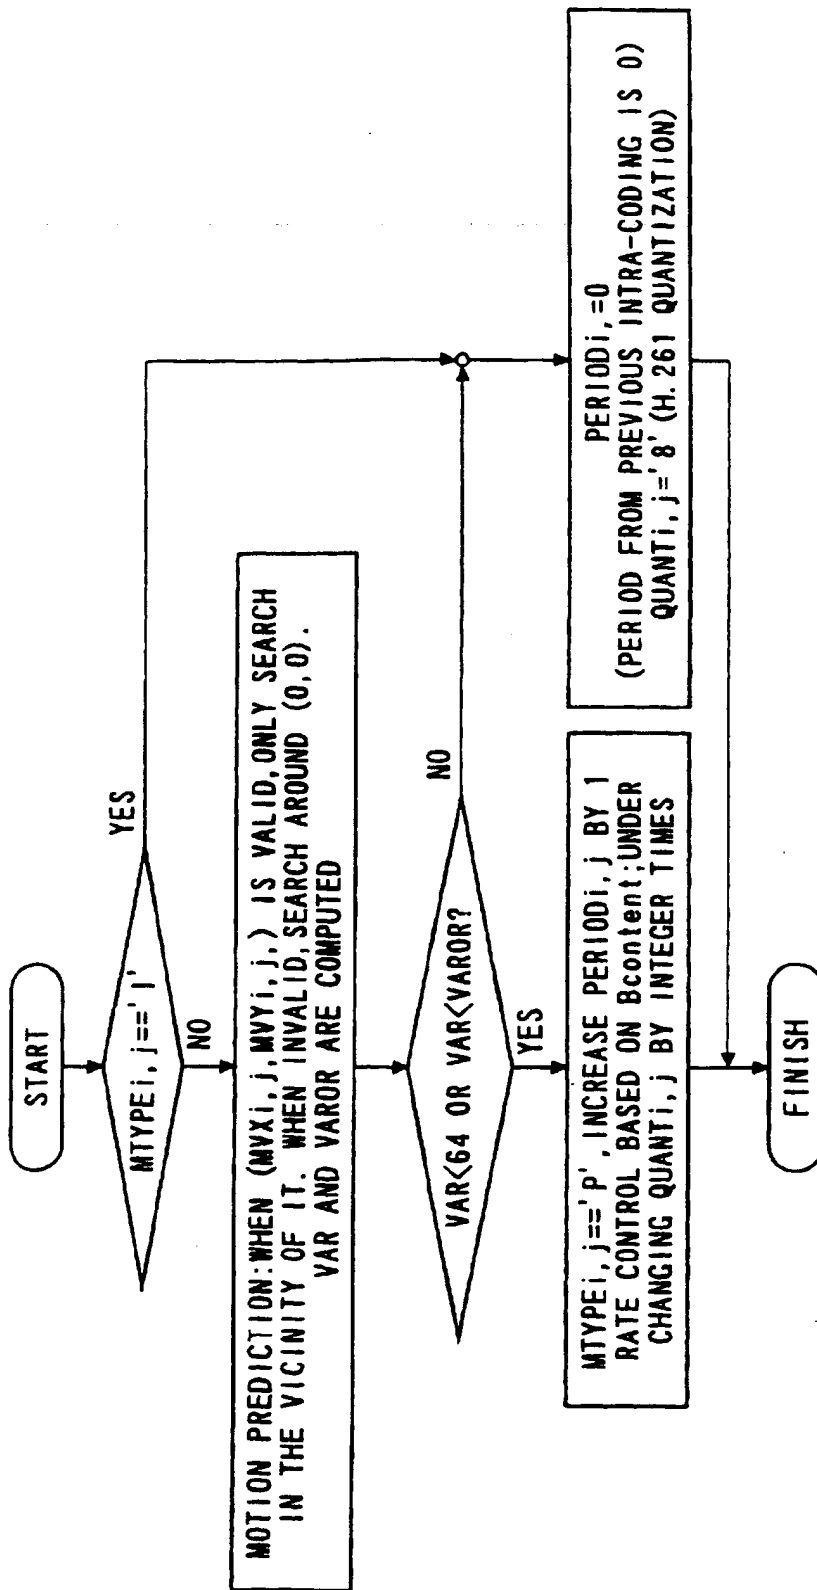


FIG. 13




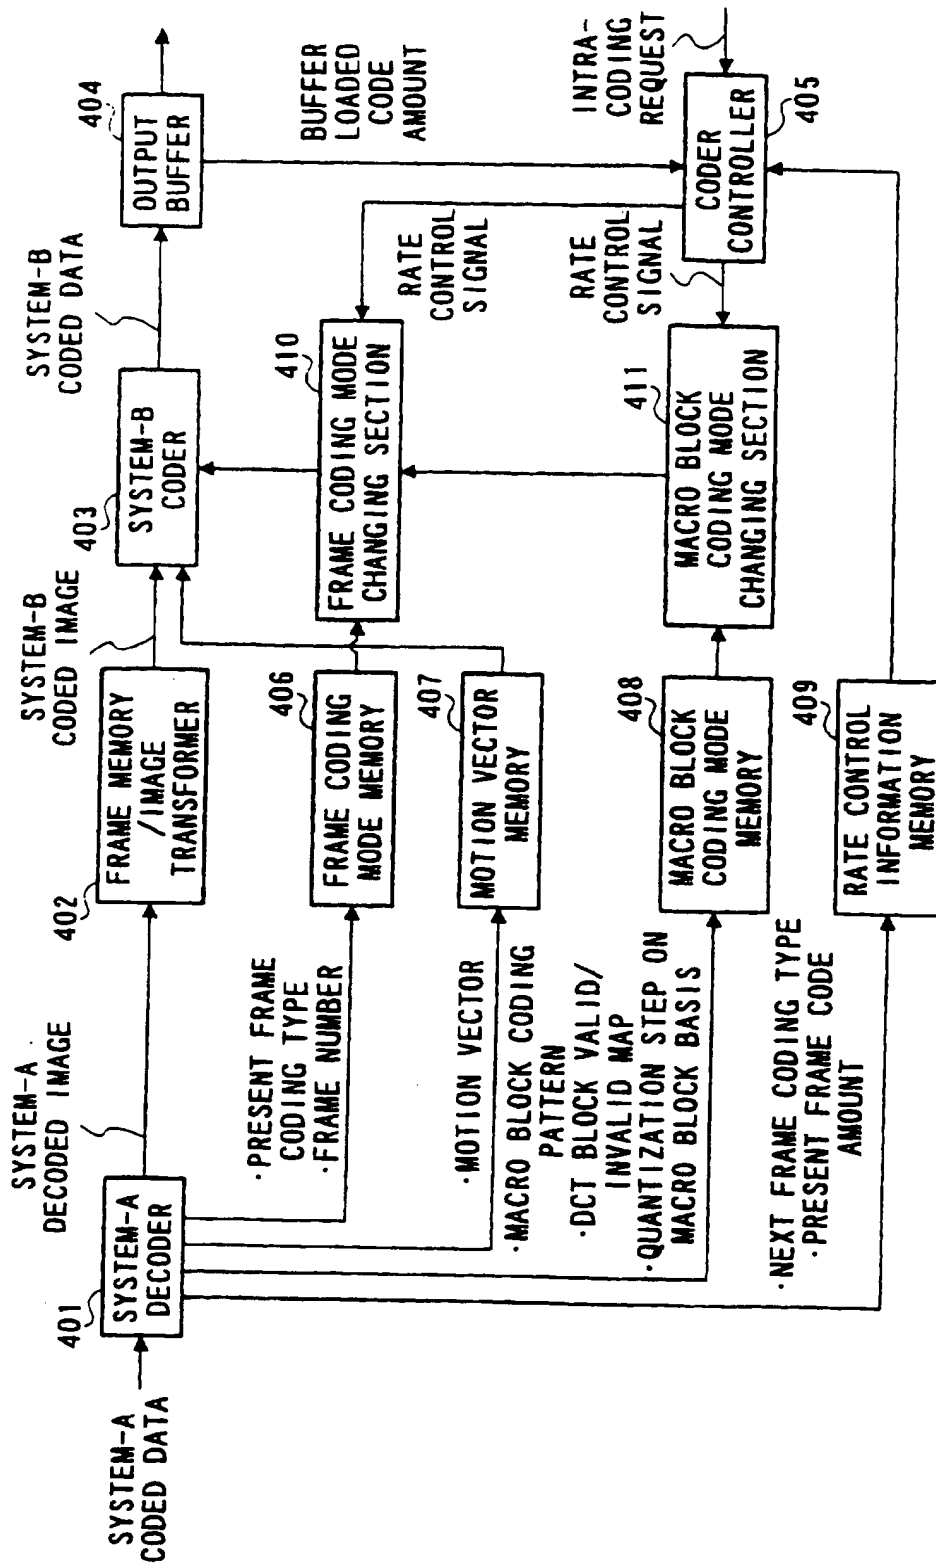


FIG. 14



**FIG. 15**

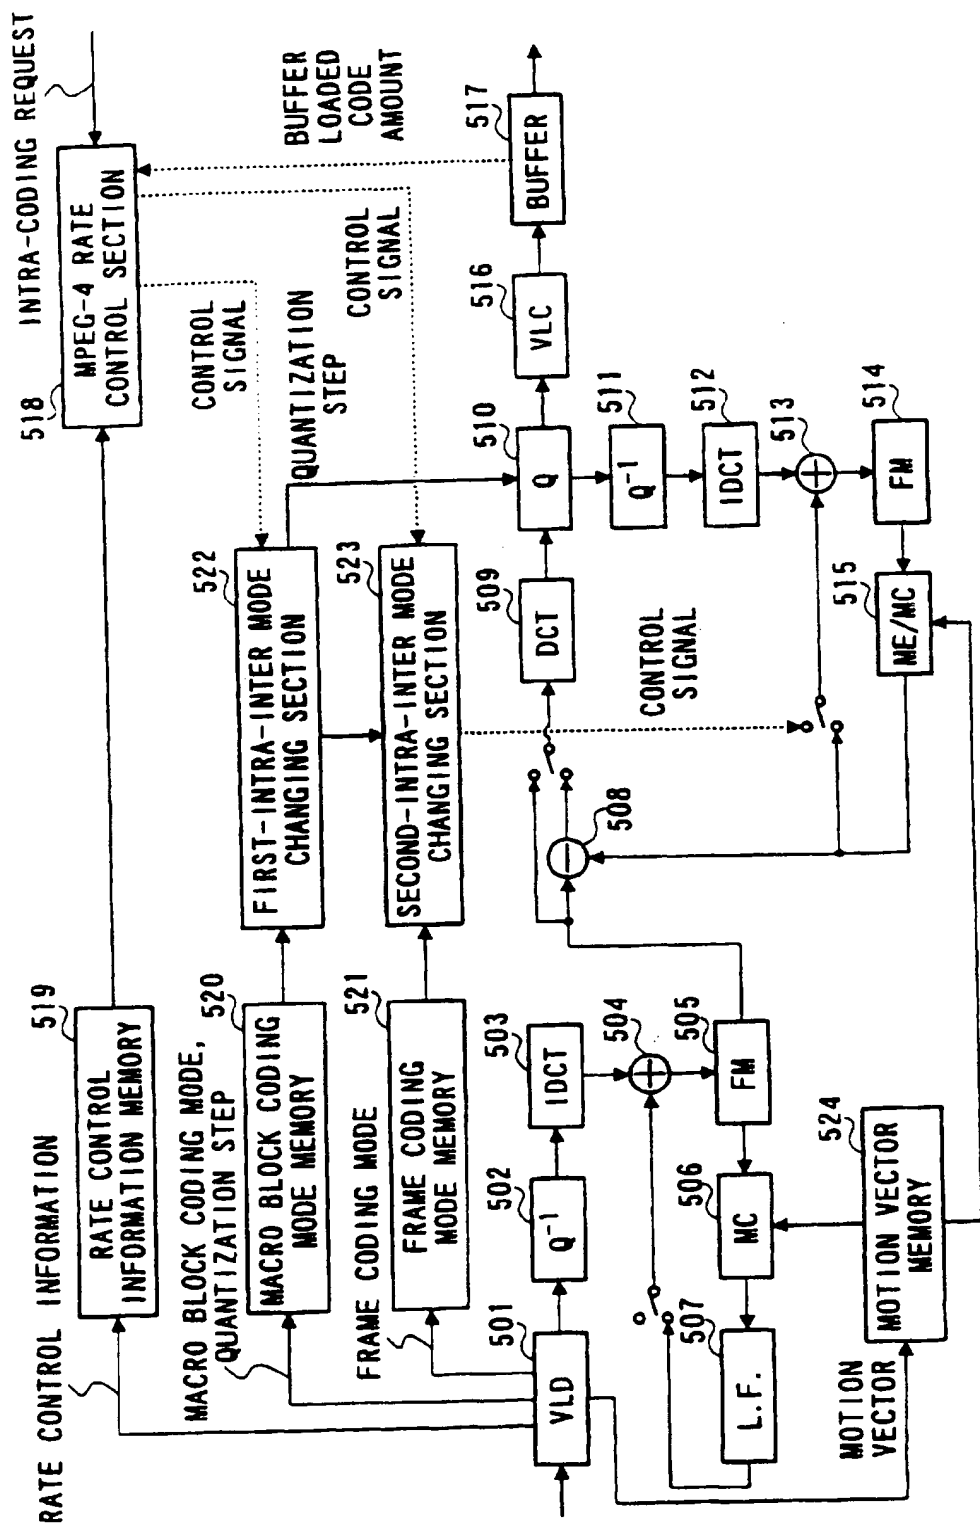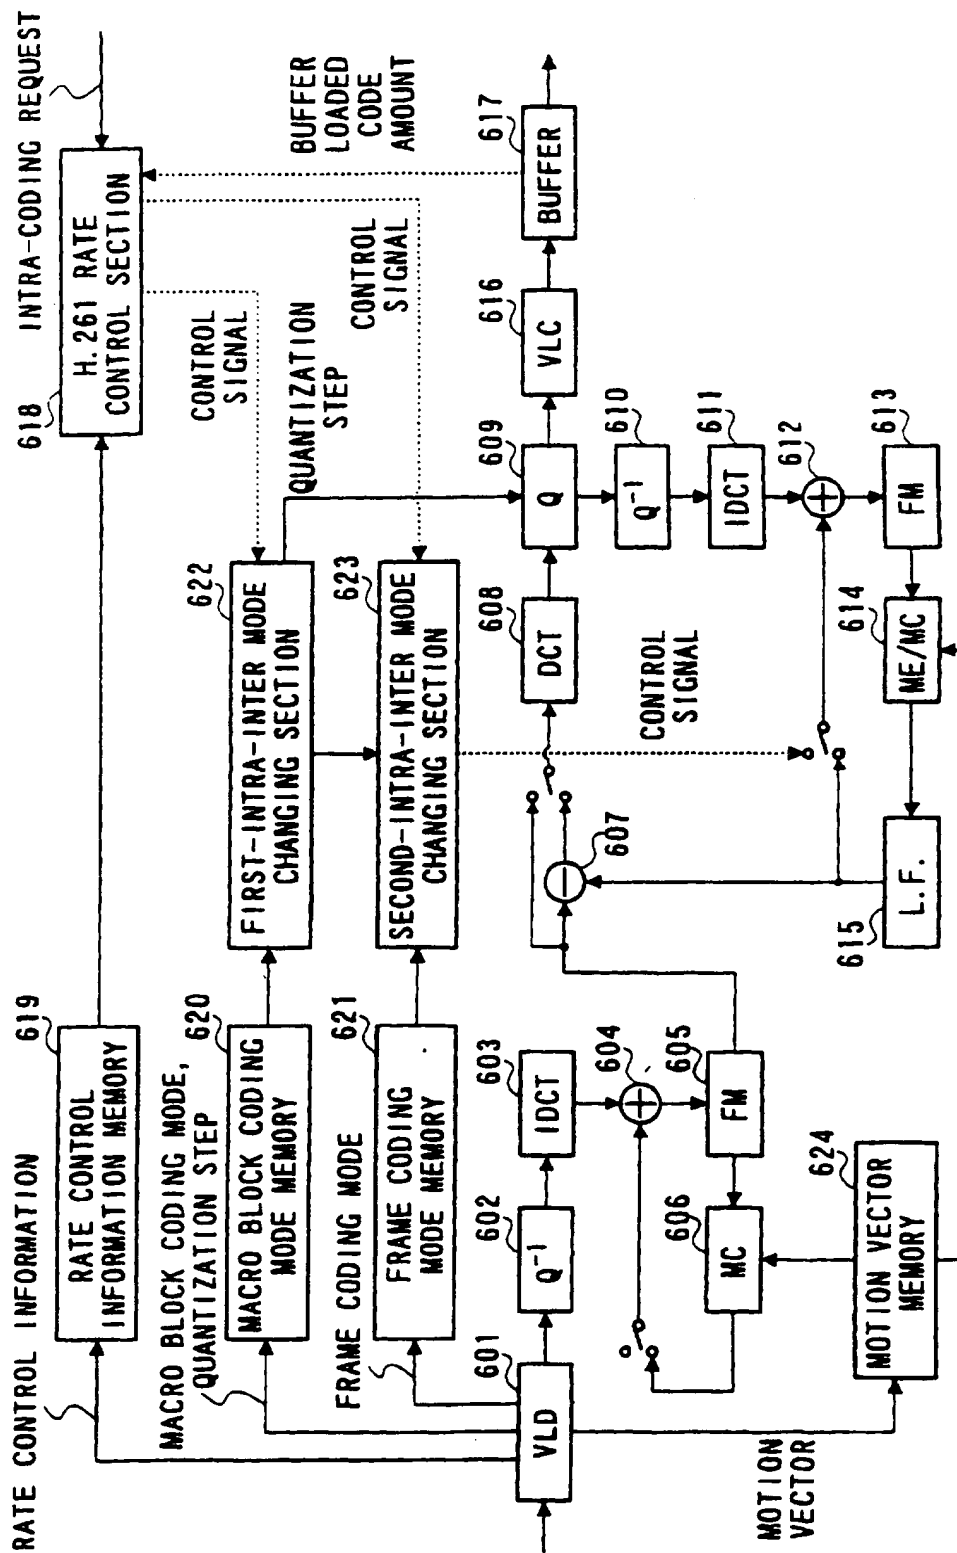



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 032 214 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
06.05.2004 Bulletin 2004/19

(51) Int Cl.: H04N 7/50, H04N 7/26

(43) Date of publication A2:  
30.08.2000 Bulletin 2000/35

(21) Application number: 00103895.9

(22) Date of filing: 24.02.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

- Uenoyama, Tsutomu  
Kawasaki-shi, Kanagawa 210-0022 (JP)
- Iwasaki, Osamu  
Tokyo 174-0074 (JP)
- Komiya, Daisaku  
Tokyo 166-0014 (JP)

(30) Priority: 25.02.1999 JP 4761399

(71) Applicant: MATSUSHITA ELECTRIC INDUSTRIAL  
CO., LTD.  
Kadoma-shi, Osaka 571-8501 (JP)

(74) Representative: Grünecker, Kinkeldey,  
Stockmair & Schwanhäusser Anwaltssozietät  
Maximilianstrasse 58  
80538 München (DE)

(72) Inventors:  
• Etoh, Minoru  
Kawasaki-shi Kanagawa 213-0013 (JP)

### (54) Method and apparatus for transcoding moving picture data

(57) The transformation method for moving picture coding system reads data of a frame from the first data sequence in the first moving picture moving coding system, prereads a coding mode of a successive frame to record, and when the preread coding mode of the successive frame is the intra-frame coding mode, performs

a control not to perform coding of a present frame or decrease a generated code amount corresponding to the generated coded content of the second data sequence in the second moving picture coding system. Then, the method preferentially transforms data coded by the intra-frame coding mode existing in the first data sequence to the second data sequence.

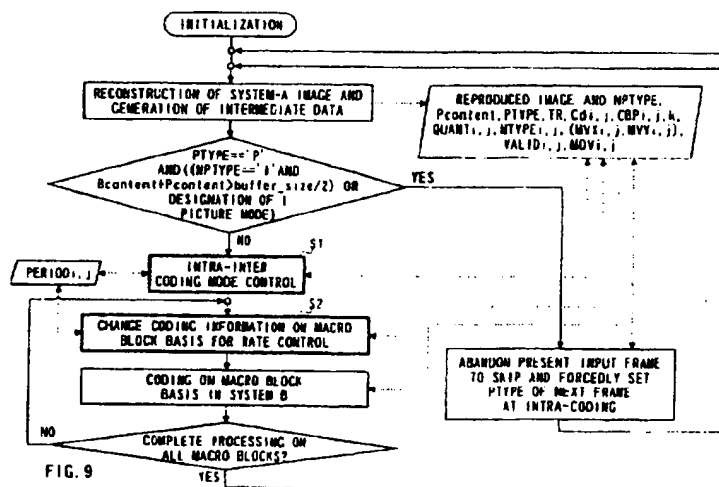


FIG. 9

EP 1 032 214 A3





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 10 3895

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (In I.C.I.7)
X	WO 98 19460 A (CHRISTOPOULOS CHARILAOS ; ERICSSON TELEFON AB L M (SE); BJOERK NIKL) 7 May 1998 (1998-05-07)	1-27	H04N7/50 H04N7/26
Y	<p>* page 6, line 5 - line 37 *</p> <p>* page 22, line 1 - page 23, line 14 *</p> <p>* figure 1 *</p> <p>---</p>	3-6,8, 10-12, 16,17	
Y	<p>EP 0 711 077 A (AT &amp; T CORP)</p> <p>8 May 1996 (1996-05-08)</p> <p>* column 5, line 43 - column 6, line 27 *</p> <p>* column 10, line 6 - column 14, line 44 *</p> <p>* figures 1,6 *</p> <p>---</p>	3-6,8, 10-12, 16,17	
A	<p>JENQ-NENG HWANG ET AL: "Dynamic frame-skipping in video transcoding" MULTIMEDIA SIGNAL PROCESSING, 1998 IEEE SECOND WORKSHOP ON REDONDO BEACH, CA, USA 7-9 DEC. 1998, PISCATAWAY, NJ, USA, IEEE, US, 7 December 1998 (1998-12-07), pages 616-621, XP010318272 ISBN: 0-7803-4919-9</p> <p>* paragraph [0004] *</p> <p>---</p> <p style="text-align: center;">-/-</p>	1-27	<p>TECHNICAL FIELDS SEARCHED (In I.C.I.7)</p> <p>H04N</p>
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>8 March 2004</b>	Examiner <b>Kuhn, P</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>&amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P0401)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 10 3895

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (INCL.7)
A	JENQ-NENG HWANG ET AL: "Motion vector re-estimation and dynamic frame-skipping for video transcoding" SIGNALS, SYSTEMS & COMPUTERS, 1998. CONFERENCE RECORD OF THE THIRTY-SECOND ASILOMAR CONFERENCE ON PACIFIC GROVE, CA, USA 1-4 NOV. 1998, PISCATAWAY, NJ, USA, IEEE, US, 1 November 1998 (1998-11-01), pages 1606-1610, XP010324470 ISBN: 0-7803-5148-7 * paragraph [0004] * * figure 3 *	1-27	TECHNICAL FIELDS SEARCHED (INCL.7)
A	BJOERK N ET AL: "TRANSCODER ARCHITECTURES FOR VIDEO CODING" IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, IEEE INC. NEW YORK, US, vol. 44, no. 1, 1 February 1998 (1998-02-01), pages 88-98, XP000779254 ISSN: 0098-3063 * page 90, right-hand column *	1-27	
A	JEONGNAM YOUN ET AL: "Adaptive motion vector refinement for high performance transcoding" IMAGE PROCESSING, 1998. ICIP 98. PROCEEDINGS. 1998 INTERNATIONAL CONFERENCE ON CHICAGO, IL, USA 4-7 OCT. 1998, LOS ALAMITOS, CA, USA, IEEE COMPUT. SOC, US, 4 October 1998 (1998-10-04), pages 596-600, XP010586804 ISBN: 0-8186-8821-1 * figures 2,3 *	1-27	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 8 March 2004	Examiner Kuhn, P
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EP Form 1500 (02/02) (P45C01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 10 3895

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	<p>ASSUNCAO P A A ET AL: "A buffer control algorithm for CBR video transcoding" IMAGE PROCESSING, 1998. ICIP 98. PROCEEDINGS. 1998 INTERNATIONAL CONFERENCE ON CHICAGO, IL, USA 4-7 OCT. 1998, LOS ALAMITOS, CA, USA, IEEE COMPUT. SOC, US, 4 October 1998 (1998-10-04), pages 370-374, XP010308491 ISBN: 0-8186-8821-1</p> <p>* page 371, paragraph 3 - page 372 *</p> <p>-----</p>	1-27	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>8 March 2004</b>	Examiner <b>Kuhn, P</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document</p>			

EP FORM 1507 (02/02/99)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO. '**

EP 00 10 3895

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-03-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9819460	A	07-05-1998	SE 515535 C2	27-08-2001
			AU 4798097 A	22-05-1998
			CN 1234943 A	10-11-1999
			EP 0934661 A1	11-08-1999
			JP 2001503225 T	06-03-2001
			SE 9603909 A	26-04-1998
			WO 9819460 A1	07-05-1998
			US 6526099 B1	25-02-2003
EP 0711077	A	08-05-1996	US 5687095 A	11-11-1997
			CA 2159846 A1	02-05-1996
			EP 0711077 A2	08-05-1996
			JP 8242451 A	17-09-1996

EPO FORM P433

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**